

LINEAR INTEGRATED CIRCUIT


3-TERMINAL 0.5A POSITIVE VOLTAGE REGULATOR

DESCRIPTION


The Contek78MXX family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 0.5 A.

FEATURES

- *Output current up to 0.5 A
- *Fixed output voltage of 5V, 6V, 8V, 9V, 12V, 15V, 18V and 24V available
- *Thermal overload shutdown protection
- *Short circuit current limiting
- *Output transistor SOA protection

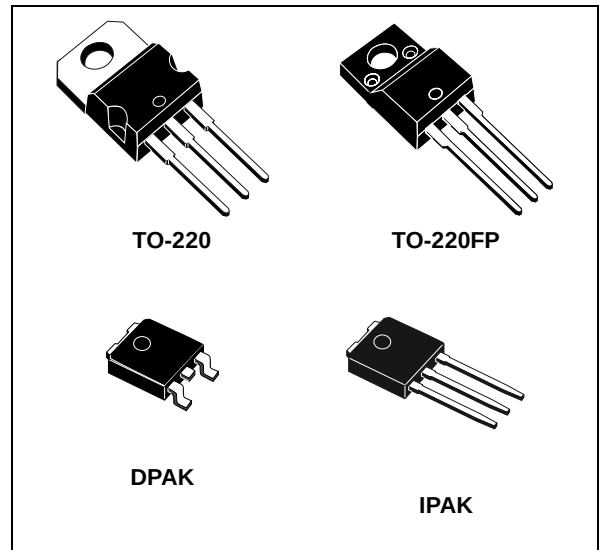

TEST CIRCUIT

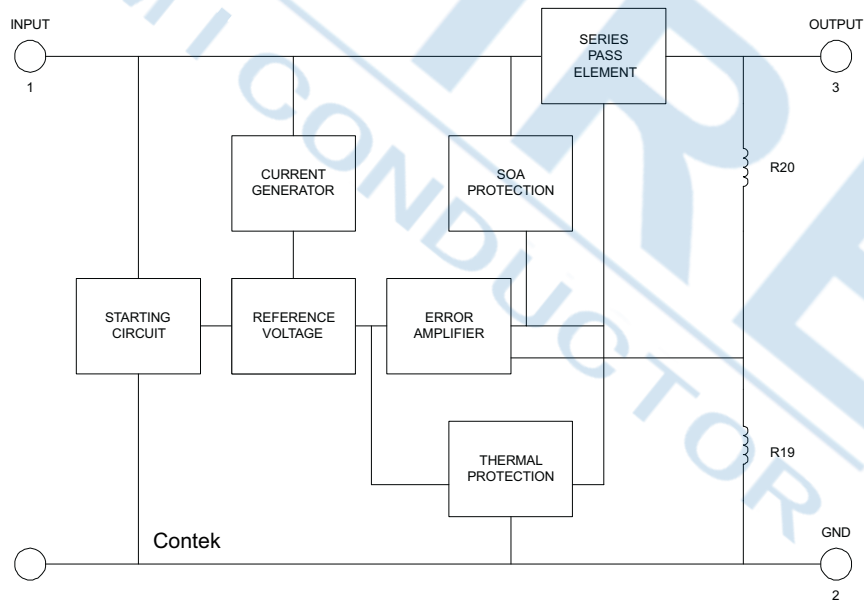

LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Input voltage (for Vo=5~18V)	VI	35	V
(for Vo=24V)	VI	40	V
Output Current	Io	0.5	A
Power Dissipation	PD	Internally Limited	W
Operating Junction Temperature Range	TOPR	0 +125	C
Storage Temperature Range	T _{STG}	-65 +150	C

Contek78M05 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, Tmin<=Tj<=125 C, Io=350mA, Vi=10V, unless otherwise specified, Ci=0.33uF, Co=0.1uF)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25 C,	4.8	5.0	5.2	V
		Io=5mA to 350mA Vi =7 to 20V	4.75	5	5.25	V
Load Regulation	ΔVo	Tj=25 C, Io=5mA-0.5A			100	mV
		Tj=25 C, Io=5mA-200mA			50	mV
Line regulation	ΔVo	Vi =7 to 25V, Tj=25 C, Io=2A			100	mV
		Vi =8 to 25V, Tj=25 C, Io=2A			50	mV
Quiescent Current	Iq	Tj=25 C		4.0	6.0	mA
Quiescent Current Change	ΔIq	Vi =8 to 25V, Io=200mA			0.8	mA
	ΔIq	Io=5mA-350mA			0.5	mA
Output Noise Voltage	VN	10Hz<=f<=100KHz		40		uV
Ripple Rejection	RR	Vi =8 to 18V, f=120Hz Io=300mA	62			dB
Peak Output Current	IPK	Tj=25 C		700		mA
Short-Circuit Current	ISC	Vi=35V, Tj=25 C		300		mA
Dropout Voltage	Vd	Tj=25 C, Io=500mA		2.0		V

Contek78M06 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, Tmin<=Tj<=125 C, Io=350mA, Vi=11V, unless otherwise specified, Ci=0.33uF, Co=0.1uF)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25 C, Io=5-350mA	5.75	6.0	6.25	V
		Vi =8 to 21V, Io=5mA-350mA	5.7	6.0	6.3	V
Load Regulation	ΔVo	Tj=25 C, Io=5mA-0.5A			120	mV
		Tj=25 C, Io=5mA-200mA			60	mV
Line regulation	ΔVo	Vi =8V to 25V, Tj=25 C, Io=2A			100	mV
		Vi =9V to 25V, Tj=25 C, Io=2A			50	mV
Quiescent Current	Iq	Tj=25 C		4.0	6	mA
Quiescent Current Change	ΔIq	Io=5mA to 350mA			0.5	mA
	ΔIq	Vi =9V to 25V, Io=200mA			0.8	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		45		uV

LINEAR INTEGRATED CIRCUIT

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Ripple Rejection	RR	$V_i = 9V$ to $19V$, $f = 120Hz$, $T_j = 25^\circ C$ $I_o = 300mA$	59			dB
Peak Output Current	IPK	$T_j = 25^\circ C$		700		mA
Short-Circuit Current	ISC	$V_i = 35V$, $T_j = 25^\circ C$		300		mA
Dropout Voltage	Vd	$T_j = 25^\circ C$		2.0		V

Contek 78M08 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, $T_{min} \leq T_j \leq 125^\circ C$, $I_o = 350mA$, $V_i = 14V$, unless otherwise specified, $C_i = 0.33\mu F$, $C_o = 0.1\mu F$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j = 25^\circ C$	7.7	8.0	8.3	V
		$V_i = 10.5V$ to $23V$, $I_o = 5mA$ - $350mA$	7.6	8.0	8.4	V
Load Regulation	ΔV_o	$T_j = 25^\circ C$, $I_o = 5mA$ - $0.5A$			160	mV
		$T_j = 25^\circ C$, $I_o = 5mA$ - $200mA$			80	mV
Line regulation	ΔV_o	$V_i = 10.5V$ to $25V$ $T_j = 25^\circ C$, $I_o = 2A$			100	mV
		$V_i = 11V$ to $25V$ $T_j = 25^\circ C$, $I_o = 2A$			50	mV
Quiescent Current	I_q	$T_j = 25^\circ C$		4.0	6	mA
Quiescent Current Change	ΔI_q	$V_i = 10.5V$ to $25V$, $I_o = 200mA$			0.8	mA
	ΔI_q	$I_o = 5mA$ to $350mA$			0.5	mA
Output Noise Voltage	VN	$10Hz \leq f \leq 100KHz$		52		μV
Ripple Rejection	RR	$V_i = 11.5V$ to $21.5V$, $f = 120Hz$, $I_o = 300mA$	56			dB
Peak Output Current	IPK	$T_j = 25^\circ C$		700		mA
Short-Circuit Current	ISC	$V_i = 35V$, $T_j = 25^\circ C$		300		mA
Dropout Voltage	Vd	$T_j = 25^\circ C$, $I_o = 500mA$		2.0		V

Contek 78M09 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, $T_{min} \leq T_j \leq 125^\circ C$, $I_o = 350mA$, $V_i = 17V$, unless otherwise specified, $C_i = 0.33\mu F$, $C_o = 0.1\mu F$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j = 25^\circ C$	8.64	9	9.36	V
		$V_i = 12.5V$ to $25V$, $I_o = 5mA$ - $350mA$	8.55	9	9.45	V
Load Regulation	ΔV_o	$T_j = 25^\circ C$, $I_o = 5mA$ - $0.5A$			200	mV
		$T_j = 25^\circ C$, $I_o = 5mA$ - $200mA$			100	mV
Line regulation	ΔV_o	$V_i = 12.5V$ to $25V$ $T_j = 25^\circ C$, $I_o = 2A$			100	mV
		$V_i = 13V$ to $25V$ $T_j = 25^\circ C$, $I_o = 2A$			50	mV
Quiescent Current	I_q	$T_j = 25^\circ C$		4.1	6	mA
Quiescent Current Change	ΔI_q	$V_i = 12.5V$ to $25V$, $I_o = 200mA$			0.8	mA
	ΔI_q	$I_o = 5mA$ - $350mA$			0.5	mA
Output Noise Voltage	VN	$10Hz \leq f \leq 100kHz$		65		μV
Ripple Rejection	RR	$V_i = 13V$ to $23V$, $f = 120Hz$ $I_o = 300mA$	55			dB
Peak Output Current	IPK	$T_j = 25^\circ C$		700		mA
Short-Circuit Current	ISC	$V_i = 35V$, $T_j = 25^\circ C$		300		mA
Dropout Voltage	Vd	$T_j = 25^\circ C$, $I_o = 500mA$		2.0		V

LINEAR INTEGRATED CIRCUIT

Contek78M12 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, $T_{min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 19\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	11.5	12.0	12.5	V
		$V_i = 14.5\text{V to } 27\text{V}$, $I_o = 5\text{mA} - 350\text{mA}$	11.4	12.0	12.6	V
Load Regulation	ΔV_o	$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 0.5\text{A}$			240	mV
		$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 2\text{A}$			120	mV
Line regulation	ΔV_o	$V_i = 14.5\text{V to } 30\text{V}$ $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			100	mV
		$V_i = 16\text{V to } 30\text{V}$ $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			50	mV
Quiescent Current	I_q	$T_j = 25^\circ\text{C}$		4.1	6.0	mA
Quiescent Current Change	ΔI_q	$V_i = 14.5\text{V to } 30\text{V}$, $I_o = 200\text{mA}$			0.8	mA
	ΔI_q	$I_o = 5\text{mA} - 350\text{mA}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} < f < 100\text{kHz}$		75		μV
Ripple Rejection	RR	$V_i = 15\text{V to } 25\text{V}$, $f = 120\text{Hz}$ $I_o = 300\text{mA}$	55			dB
Peak Output Current	IPK	$T_j = 25^\circ\text{C}$		700		mA
Short-Circuit Current	ISC	$V_i = 35\text{V}$, $T_j = 25^\circ\text{C}$		300		mA
Dropout Voltage	V_d	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2.0		V

Contek78M15 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, $T_{min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 23\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	14.4	15.0	15.6	V
		$V_i = 17.5\text{V to } 30\text{V}$, $I_o = 5\text{mA} - 350\text{mA}$	14.25	15.0	15.75	V
Load Regulation	ΔV_o	$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 0.5\text{A}$			300	mV
		$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 200\text{mA}$			150	mV
Line regulation	ΔV_o	$V_i = 17.5\text{V to } 30\text{V}$ $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			100	mV
		$V_i = 20\text{V to } 30\text{V}$ $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			50	mV
Quiescent Current	I_q	$T_j = 25^\circ\text{C}$		4.1	6.0	mA
Quiescent Current Change	ΔI_q	$V_i = 17.5\text{V to } 30\text{V}$, $I_o = 200\text{mA}$			0.8	mA
	ΔI_q	$I_o = 5\text{mA} - 350\text{mA}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} < f < 100\text{KHz}$		90		μV
Ripple Rejection	RR	$V_i = 18.5\text{V to } 28.5\text{V}$ $f = 120\text{Hz}$, $I_o = 300\text{mA}$	54			dB
Peak Output Current	IPK	$T_j = 25^\circ\text{C}$		700		mA
Short-Circuit Current	ISC	$V_i = 35\text{V}$, $T_j = 25^\circ\text{C}$		300		mA
Dropout Voltage	V_d	$T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$		2.0		V

LINEAR INTEGRATED CIRCUIT

Contek78M18 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, $T_{min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 26\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	17.3	18.0	18.7	V
		$V_i = 20.5\text{V to } 33\text{V}$ $I_o = 5\text{mA} - 350\text{mA}$	17.1	18.0	18.9	V
Load Regulation	ΔV_o	$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 0.5\text{A}$			360	mV
		$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 200\text{mA}$			180	mV
Line regulation	ΔV_o	$V_i = 21\text{V to } 33\text{V}$ $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			100	mV
		$V_i = 24\text{V to } 33\text{V}$, $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			50	mV
Quiescent Current	I_q	$T_j = 25^\circ\text{C}$		4.2	6	mA
Quiescent Current Change	ΔI_q	$V_i = 21\text{V to } 33\text{V}$, $I_o = 200\text{mA}$			0.8	mA
	ΔI_q	$I_o = 5\text{mA} - 350\text{mA}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} < f < 100\text{KHz}$		100		μV
Ripple Rejection	RR	$V_i = 22\text{V to } 32\text{V}$, $f = 120\text{Hz}$ $I_o = 300\text{mA}$	53			dB
Peak Output Current	IPK	$T_j = 25^\circ\text{C}$		700		mA
Short-Circuit Current	ISC	$V_i = 35\text{V}$, $T_j = 25^\circ\text{C}$		300		mA
Dropout Voltage	V_d	$T_j = 25^\circ\text{C}$		2.0		V


Contek78M24 ELECTRICAL CHARACTERISTICS

(Refer to the test circuits, $T_{min} \leq T_j \leq 125^\circ\text{C}$, $I_o = 350\text{mA}$, $V_i = 33\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	23.0	24.0	25.0	V
		$V_i = 27\text{V to } 38\text{V}$ $I_o = 5\text{mA} - 350\text{mA}$	22.8	24.0	25.2	V
Load Regulation	ΔV_o	$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 0.5\text{A}$			480	mV
		$T_j = 25^\circ\text{C}$, $I_o = 5\text{mA} - 200\text{mA}$			240	mV
Line regulation	ΔV_o	$V_i = 27\text{V to } 38\text{V}$ $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			100	mV
		$V_i = 28\text{V to } 38\text{V}$ $T_j = 25^\circ\text{C}$, $I_o = 2\text{A}$			50	mV
Quiescent Current	I_q	$T_j = 25^\circ\text{C}$		4.2	6.0	mA
Quiescent Current Change	ΔI_q	$V_i = 27\text{V to } 38\text{V}$, $I_o = 200\text{mA}$			0.8	mA
	ΔI_q	$I_o = 5\text{mA} - 350\text{mA}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} < f < 100\text{KHz}$		170		μV
Ripple Rejection	RR	$V_i = 28\text{V to } 38\text{V}$, $f = 120\text{Hz}$ $I_o = 300\text{mA}$	50			dB
Peak Output Current	IPK	$T_j = 25^\circ\text{C}$		700		mA
Short-Circuit Current	ISC	$V_i = 35\text{V}$, $T_j = 25^\circ\text{C}$		300		mA
Dropout Voltage	V_d	$T_j = 25^\circ\text{C}$		2.0		V

Note 1: The Maximum steady state usable output current are dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represents pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation $< 0.5\text{W}$

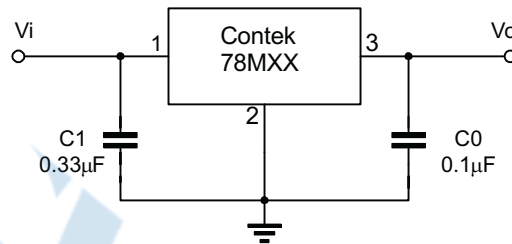LINEAR INTEGRATED CIRCUIT**APPLICATION CIRCUIT**

Note 1: To specify an output voltage, substitute voltage value for " MXX".

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.
