# Quadruple Operational Amplifiers

DESCRIPTION

The LMx24 consists of four independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, DC gain blocks and all the conventional op amp circuits.

FEATURES

- Wide range of supply voltages
- Low supply current drain independent of supply voltage
- Low input biasing current
- Low input offset voltage and offset current
- Input common-mode voltage range includes ground
- Differential input voltage range equal to the power supply voltage
- DC voltage gain 100 V/ mV Typ
- Internally frequency compensation

SOP14
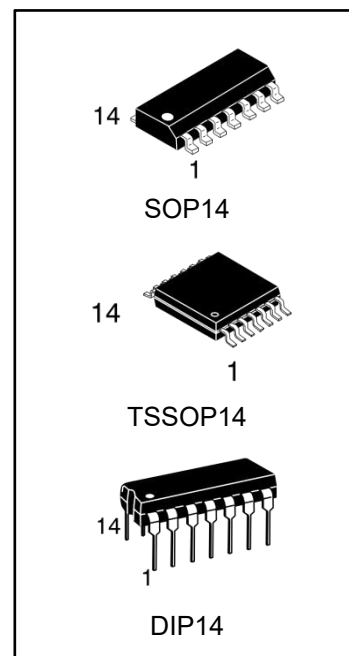
TSSOP14

DIP14

ORDERING INFORMATION

DEVICE	Package Type	MARKING	Packing	Packing Qty
LM324PG	DIP14	LM324	TUBE	1000/box
LM224PG	DIP14	LM224	TUBE	1000/box
LM324DRG	SOP14	LM324	REEL	2500/reel
LM224DRG	SOP14	LM224	REEL	2500/reel
LM324PWRG	TSSOP14	LM324	REEL	2500/reel
LM224PWRG	TSSOP14	LM224	REEL	2500/reel

PACKAGE INFORMATION
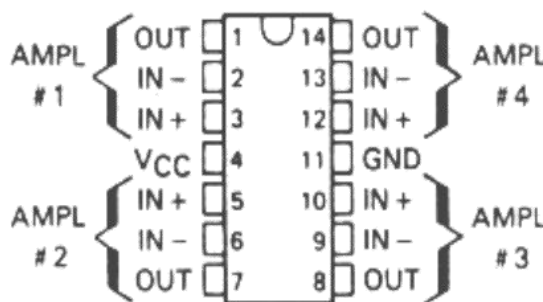
DIP14/SOP14/TSSOP14

ELECTRICAL CHARACTERISTICS

at specified free-air temperature, VCC = 5V (unless otherwise noted)

PARAMETER	TEST CONDITIONS*		LM224/ LM324			UNIT
			MIN	TYP	MAX	
V$_{IO}$ Input offset voltage	Vcc =5V to MAX, V$_{IC}$ = V$_{ICR}$ min, V$_O$=1.4V	25℃		3	7	mV
		Full temperature range			9	
αV$_{IO}$ Average temperature coefficient of input offsetvoltage		Full temperature range		7		µV/℃
I$_{IO}$ Input offset current	Vo=1.4V	25℃		2	50	nA
		Full temperature range			150	
αI$_{IO}$ Average temperature coefficient of input offsetcurrent		Full temperature range		10		pA/℃
I$_{IB}$ Input bias current	Vo=1.4V	25℃		-20	-250	nA
		Full temperature range			-500	
VICR Common-mode input voltage range	Vcc = 5V to MAX	25℃	0 to Vcc-1.5			V
		Full temperature range	0 to Vcc - 2			
VOH High-level output voltage	RL = 2 kΩ	25℃	Vcc-1.5			V
	Vcc = MAX, R$_L$ =2kΩ	Full temperature range	26			
	Vcc = MAX, RL = 10 kΩ	Full temperature range	27	28		
VOL Low-level output voltage	RL = 10 kΩ	Full temperature range		5	20	mV
AVD Large-signal differential voltage amplification	Vcc = 15 V, Vo=1V to 11 V, RL ≥ 2 kΩ	25℃	25	100		V/mV
		Full temperature range	15			
CMRR Common-mode rejection ratio	Vcc = 5V to MAX, V$_{IC}$ = V$_{ICR}$ min	25℃	65	80		dB
k$_{SVR}$ Supply voltage rejection ratio (ΔVcc/ΔV$_{IO}$)	Vcc = 5V to MAX	25℃	65	100		dB
Vo1/Vo2 Crosstalk attenuation	f=1kHz to 20 kHz	25℃		120		dB
I$_O$ Output current	Vcc = 15 V, V$_{ID}$=1V,Vo= 0	25 ℃	-20	-30		mA
		Full temperature range	-10			
	Vcc = 15 V, V$_{ID}$= -1V, Vo=15V	25 ℃	10	20		
		Full temperature range	5			
	V$_{ID}$= -1V, Vo = 200 mV	25℃	12	30		µA
Ios Short-circuit output current	Vcc at 5 V, GND at -5V,Vo=0	25℃		±40	±60	mA
Icc Supply current (four amplifiers)	Vo = 2.5 V, No load	Full temperature range		1.5	2.4	mA
	Vcc = MAX, Vo = 0.5Vcc, Noload	Full temperature range		1.1	3	

* All characteristics are measured under open loop conditions with zero common-mode input voltage unless otherwise specified.

"MAX" Vcc for testing purposes is 30 V. LM224 Operating temperature -40 - 85° C, LM324 Operating temperature 0 - 70° C, MAX Junction temperature + 125°C.
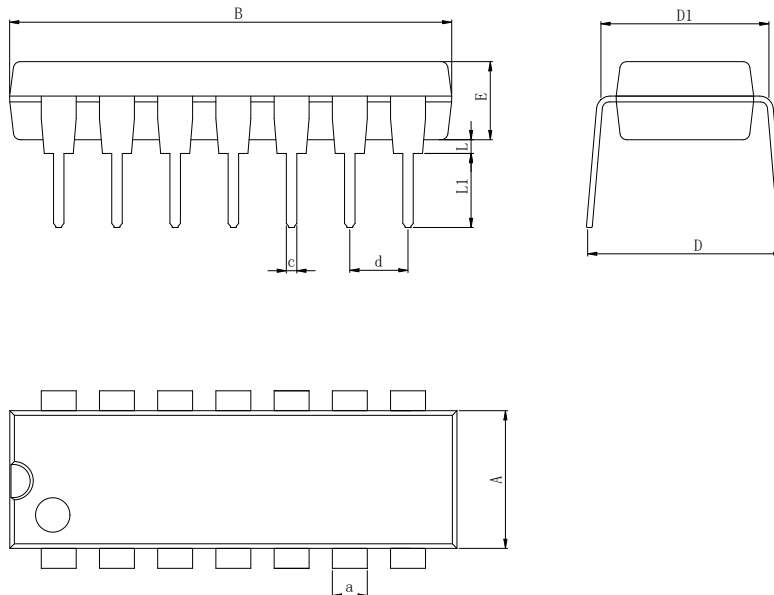
Physical Dimensions
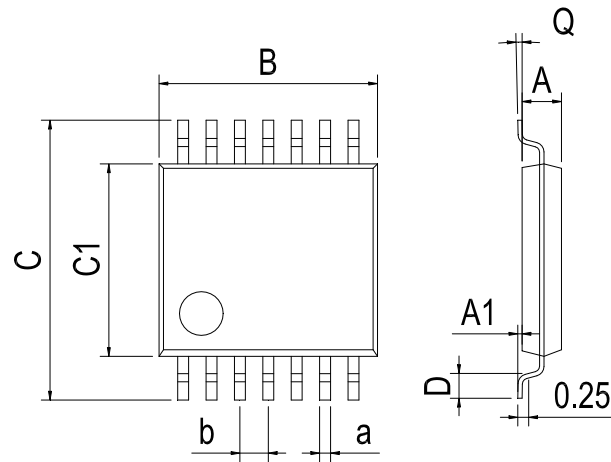
SOP14
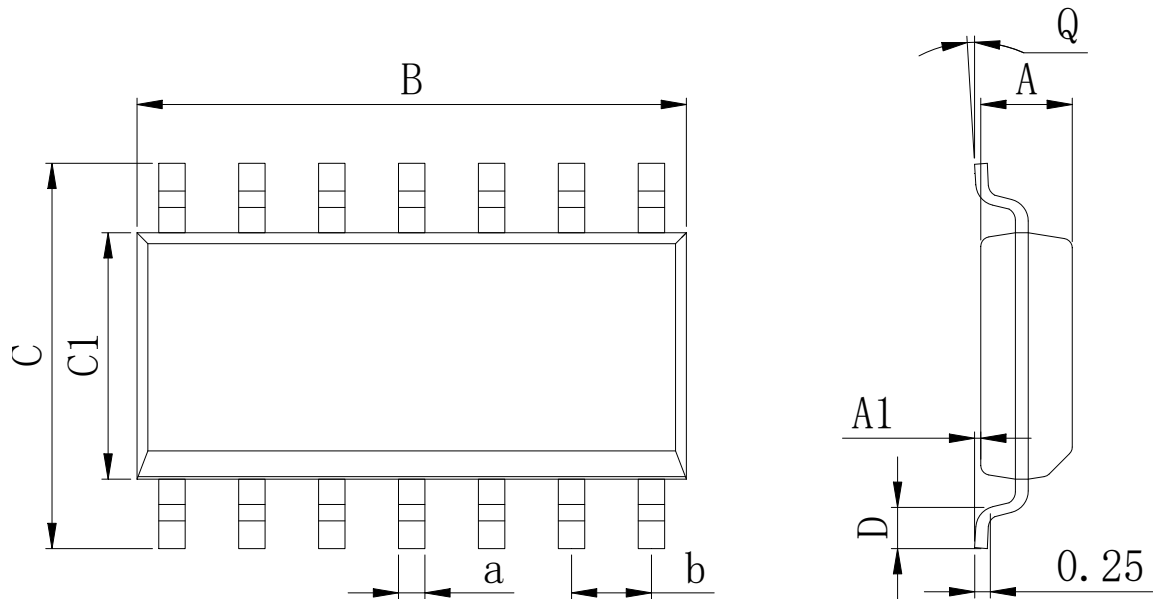
Dimensions In Millimeters(SOP14)								
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	8.55	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	8.75	6.20	4.00	0.80	8°	0.45	

DIP14

Dimensions In Millimeters(DIP14)								
Symbol:	A	B	D	D1	E	L	L1	a	c	d
Min:	6.10	18.94	8.40	7.42	3.10	0.50	3.00	1.50	0.40	2.54 BSC
Max:	6.68	19.56	9.00	7.82	3.55	0.70	3.60	1.55	0.50	

TSSOP14

Dimensions In Millimeters(TSSOP14)								
Symbol：	A	A1	B	C	C1	D	Q	a	b
Min：	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max：	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

IMPORTANT STATEMENT:

Hanschip Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Hanschip Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Hanschip Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Hanschip Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Hanschip Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Hanschip Semiconductor will not bear the consequences caused by the application of products in these fields.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Hanschip Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Hanschip Semiconductor. Not all parameters of each device need to be tested.

The documentation of Hanschip Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Hanschip Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Hanschip Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Hanschip Semiconductor accepts no liability for any loss or damage caused by infringement.