



SEP ELECTRONIC CORP.

# GBU15005 thru GBU1510



## Features


- Ideal for P.C. Board mounting
- High surge current capability
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- High temperature soldering guaranteed 265°C /10 seconds at 5 lbs (2.3kg) tension

## Mechanical Data

Case: Molded plastic body  
 Terminals: Plated leads solderable per MIL-STD-202,  
 Method 208  
 Polarity: Polarity symbols molded on body  
 Mounting Position:: Any  
 Mounting Torque: 5 in-lbs max.  
 Weight: 4.0 grams (approx)

## 15.0 A Single-Phase Bridge Rectifier

Rectifier Reverse Voltage 50 to 1000V

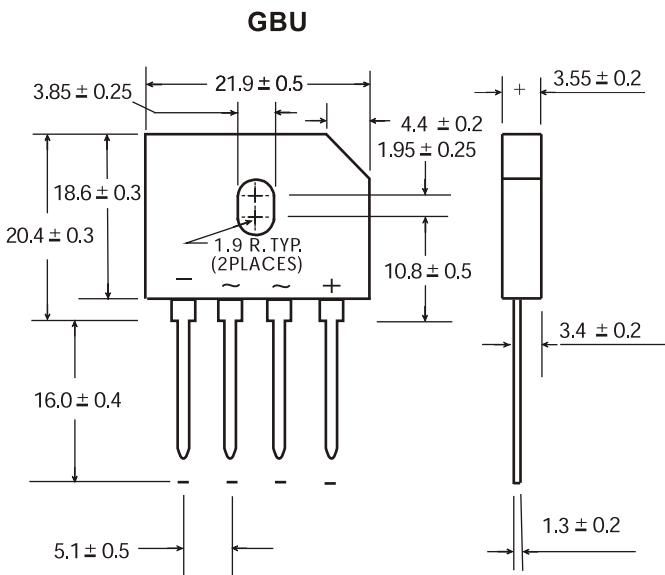

Dimensions in millimeters(1mm = 0.0394")

## Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.  
 For Capacitive load derate current by 20%.

Parameter	Symbol	GBU 15005	GBU 1501	GBU 1502	GBU 1504	GBU 1506	GBU 1508	GBU 1510	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward (with heatsink note1 ) rectified current at Tc=100°C (without heatsink)	IF(AV)				15.0	3.2			A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				200				A
Rating for fusing ( t<8.3ms)	I <sup>2</sup> t				166				A <sup>2</sup> sec
Typical thermal resistance per element (note 1)	RthJC				2.0				°C / W
Operating junction and storage temperature range	TJ, TSTG				-55 to + 150				°C

## Electrical Characteristics


Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.  
 For Capacitive load derate by 20 %.

Parameter	Symbol	GBU 15005	GBU 1501	GBU 1502	GBU 1504	GBU 1506	GBU 1508	GBU 1510	Unit
Maximum instantaneous forward voltage drop per leg at 7.5A	VF				1.1				V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR				5.0	500			μA


Notes: (1) Device mounted on 200mm x 200mm x 5.0mm Al Plate Heatsink.

**Rating and Characteristic Curves (  $T_A=25^\circ\text{C}$  Unless otherwise noted )**  
**GBU15005 thru GBU1510**


**Fig. 1 Derating Curve for Output Rectified Current**

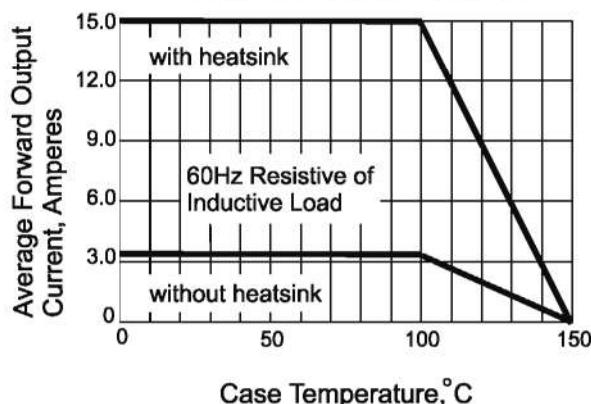


**Fig. 2 Maximum Non-repetitive Peak Forward Surge Current**

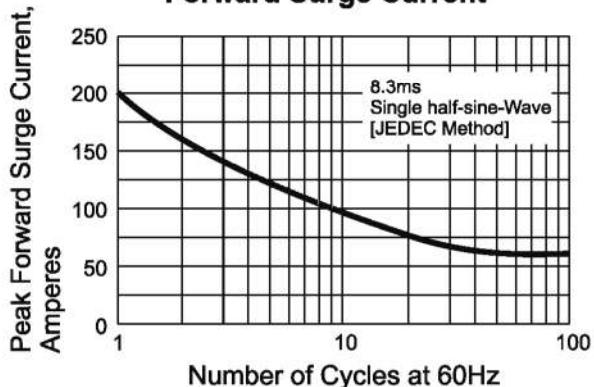

**Fig. 3 Typical Instantaneous Forward Characteristics**

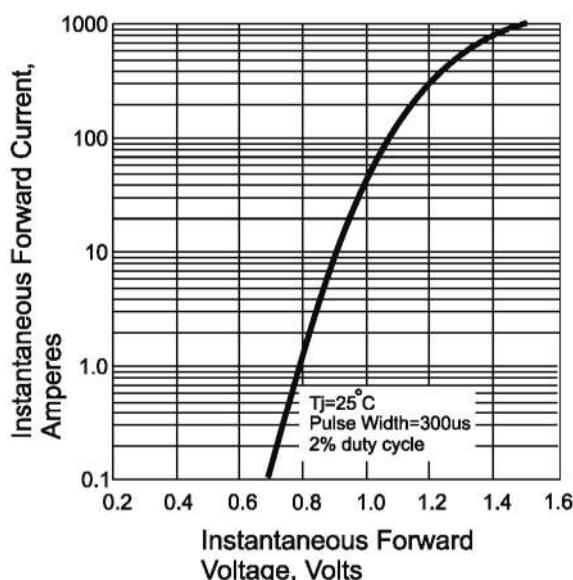

**Fig. 4 Typical Reverse Characteristics**

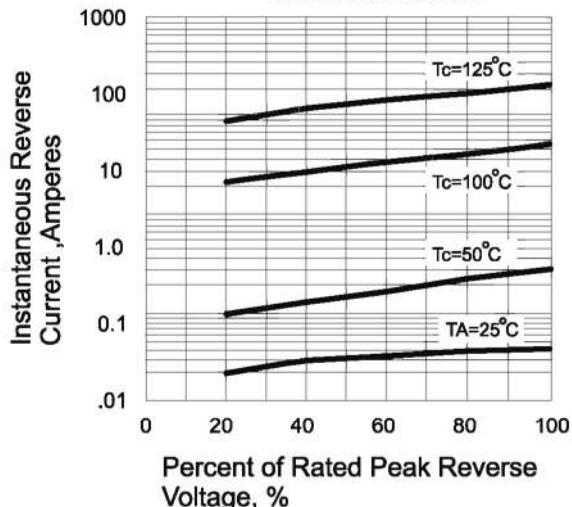

**Fig. 5 Typical Junction Capacitance**

