




## SMBJxxAH、SMBJxxCAH Series 600W TVS

Rev.4

### DESCRIPTION:

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.



SMB

### FEATURES:

- ✧ Low profile package.
- ✧ Low inductance.
- ✧ Excellent clamping capability.
- ✧ 600W peak pulse power capability at 10×1000μs waveform.
- ✧ Typical I<sub>R</sub> less than 1μA.
- ✧ Fast response time: typically less than 1.0ps from 0V to V<sub>BR</sub> min.
- ✧ High temperature to reflow soldering:260℃/40s at terminals.
- ✧ Plastic package has underwriters laboratory flammability 94V-0.
- ✧ Meets MSL level 1, per J-STD020, LF maximum peak of 260℃.
- ✧ For surface mounted applications in order to optimize board space.
- ✧ High reliability application and automotive grade (AEC-Q101 qualified).



Bi-directional



Uni-directional

Symbol

### ABSOLUTE MAXIMUM RATINGS(T<sub>A</sub>=25℃, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Operating junction and storage temperature range	T <sub>J</sub> /T <sub>STG</sub>	-55 to +150	℃
Steady state power dissipation at T <sub>L</sub> =75℃	P <sub>M(AV)</sub>	5.0	W
Peak pulse power dissipation on 10/1000μs waveform	P <sub>PP</sub>	600	W
Maximum instantaneous forward voltage at 50A for unidirectional	V <sub>F</sub>	5.0	V
Peak forward surge current, 8.3ms single half sine wave (Note 1)	I <sub>FSM</sub>	100	A
Typical thermal resistance junction to lead	R <sub>θJL</sub>	20	℃/W
Typical thermal resistance junction to ambient	R <sub>θJA</sub>	100	℃/W

### Notes:

- 1 Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum

## MARKING



AZ: Device Marking Code  
1409: In ninth week, 2014

ELECTRICAL CHARACTERISTICS( $T_A=25^\circ\text{C}$ )

Part Number		Marking		$V_R$	$I_R@V_R$	$V_{BR}@I_T$		$I_T$	$V_C@I_{PP}$	$I_{PP}^{\text{①}}$
Uni-Polar	Bi-Polar	Uni	Bi	V	$\mu\text{A}$	min(V)	max(V)	mA	max(V)	A
SMBJ11AH	SMBJ11CAH	KZ	AZ	11	1	12.20	13.50	1	18.2	33.0
SMBJ12AH	SMBJ12CAH	LE	BE	12	1	13.30	14.70	1	19.9	30.2
SMBJ13AH	SMBJ13CAH	LG	BG	13	1	14.40	15.90	1	21.5	27.9
SMBJ14AH	SMBJ14CAH	LK	BK	14	1	15.60	17.20	1	23.2	25.9
SMBJ15AH	SMBJ15CAH	LM	BM	15	1	16.70	18.50	1	24.4	24.6
SMBJ16AH	SMBJ16CAH	LP	BP	16	1	17.80	19.70	1	26.0	23.1
SMBJ17AH	SMBJ17CAH	LR	BR	17	1	18.90	20.90	1	27.6	21.8
SMBJ18AH	SMBJ18CAH	LT	BT	18	1	20.00	22.10	1	29.2	20.6
SMBJ20AH	SMBJ20CAH	LV	BV	20	1	22.20	24.50	1	32.4	18.6
SMBJ22AH	SMBJ22CAH	LX	BX	22	1	24.40	26.90	1	35.5	16.9
SMBJ24AH	SMBJ24CAH	LZ	BZ	24	1	26.70	29.50	1	38.9	15.4
SMBJ26AH	SMBJ26CAH	ME	CE	26	1	28.90	31.90	1	42.1	14.3
SMBJ28AH	SMBJ28CAH	MG	CG	28	1	31.10	34.40	1	45.4	13.2
SMBJ30AH	SMBJ30CAH	MK	CK	30	1	33.30	36.80	1	48.4	12.4
SMBJ33AH	SMBJ33CAH	MM	CM	33	1	36.70	40.60	1	53.3	11.3
SMBJ36AH	SMBJ36CAH	MP	CP	36	1	40.00	44.20	1	58.1	10.4
SMBJ40AH	SMBJ40CAH	MR	CR	40	1	44.40	49.10	1	64.5	9.3
SMBJ43AH	SMBJ43CAH	MT	CT	43	1	47.80	52.80	1	69.4	8.7
SMBJ45AH	SMBJ45CAH	MV	CV	45	1	50.00	55.30	1	72.7	8.3
SMBJ48AH	SMBJ48CAH	MX	CX	48	1	53.30	58.90	1	77.4	7.8
SMBJ51AH	SMBJ51CAH	MZ	CZ	51	1	56.70	62.70	1	82.4	7.3
SMBJ54AH	SMBJ54CAH	NE	DE	54	1	60.00	66.30	1	87.1	6.9


ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C, continued)

Part Number		Marking		V <sub>R</sub>	I <sub>R</sub> @V <sub>R</sub>	V <sub>BR</sub> @I <sub>T</sub>		I <sub>T</sub>	V <sub>C</sub> @I <sub>PP</sub>	I <sub>PP</sub> <sup>①</sup>
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMBJ58AH	SMBJ58CAH	NG	DG	58	1	64.40	71.20	1	93.6	6.4
SMBJ60AH	SMBJ60CAH	NK	DK	60	1	66.70	73.70	1	96.8	6.2
SMBJ64AH	SMBJ64CAH	NM	DM	64	1	71.10	78.60	1	103.0	5.8
SMBJ70AH	SMBJ70CAH	NP	DP	70	1	77.80	86.00	1	113.0	5.3
SMBJ75AH	SMBJ75CAH	NR	DR	75	1	83.30	92.10	1	121.0	5.0
SMBJ78AH	SMBJ78CAH	NT	DT	78	1	86.70	95.80	1	126.0	4.8
SMBJ85AH	SMBJ85CAH	NV	DV	85	1	94.40	104.0	1	137.0	4.4
SMBJ90AH	SMBJ90CAH	NX	DX	90	1	100.0	111.0	1	146.0	4.1
SMBJ100AH	SMBJ100CAH	NZ	DZ	100	1	111.0	123.0	1	162.0	3.7
SMBJ110AH	SMBJ110CAH	PE	EE	110	1	122.0	135.0	1	177.0	3.4
SMBJ120AH	SMBJ120CAH	PG	EG	120	1	133.0	147.0	1	193.0	3.1
SMBJ130AH	SMBJ130CAH	PK	EK	130	1	144.0	159.0	1	209.0	2.9
SMBJ150AH	SMBJ150CAH	PM	EM	150	1	167.0	185.0	1	243.0	2.5
SMBJ160AH	SMBJ160CAH	PP	EP	160	1	178.0	197.0	1	259.0	2.3
SMBJ170AH	SMBJ170CAH	PR	ER	170	1	189.0	209.0	1	275.0	2.2
SMBJ180AH	SMBJ180CAH	PT	ET	180	1	201.0	222.0	1	292.0	2.1
SMBJ190AH	SMBJ190CAH	PV	EV	190	1	211.0	234.0	1	307.0	2.0
SMBJ200AH	SMBJ200CAH	PX	EX	200	1	224.0	247.0	1	324.0	1.9
SMBJ210AH	SMBJ210CAH	PZ	EZ	210	1	233.0	258.0	1	337.0	1.8
SMBJ220AH	SMBJ220CAH	QE	FE	220	1	246.0	272.0	1	356.0	1.7
SMBJ250AH	SMBJ250CAH	QG	FG	250	1	279.0	309.0	1	405.0	1.5
SMBJ300AH	SMBJ300CAH	QK	FK	300	1	335.0	371.0	1	486.0	1.3
SMBJ350AH	SMBJ350CAH	QM	FM	350	1	391.0	432.0	1	567.0	1.1
SMBJ400AH	SMBJ400CAH	QP	FP	400	1	447.0	494.0	1	648.0	0.9
SMBJ440AH	SMBJ440CAH	QR	FR	440	1	492.0	543.0	1	713.0	0.8
SMBJ460AH	SMBJ460CAH	QT	FT	460	1	510.0	560.0	1	735.0	0.8

① Surge waveform:10/1000μs

V<sub>R</sub>: Stand-off voltage -- Maximum voltage that can be appliedV<sub>BR</sub>: Breakdown voltageV<sub>C</sub>: Clamping voltage -- Peak voltage measured across the suppressor at a specified I<sub>pp</sub>I<sub>R</sub>: Reverse leakage current

ORDERING INFORMATION

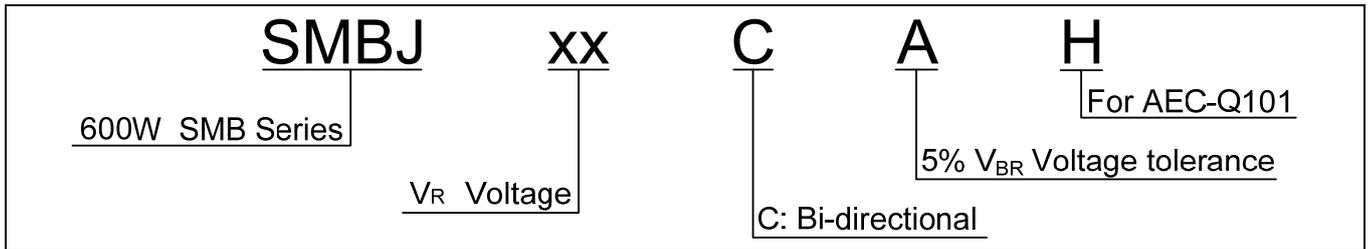

RATINGS AND V-I CHARACTERISTICS CURVES ( $T_A=25^\circ C$ , unless otherwise noted)

FIG.1: V- I curve characteristics (Uni-directional)

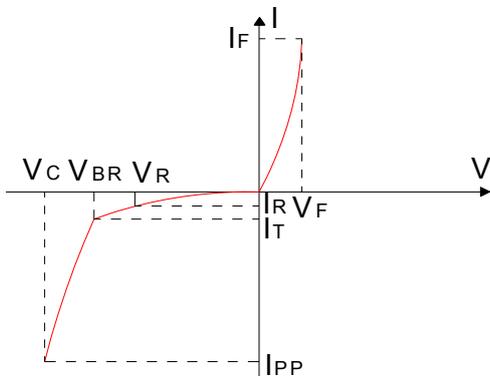


FIG.2: V- I curve characteristics (Bi-directional)

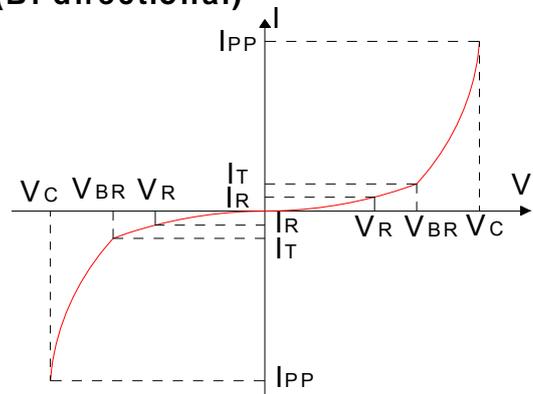


FIG.3: Pulse waveform



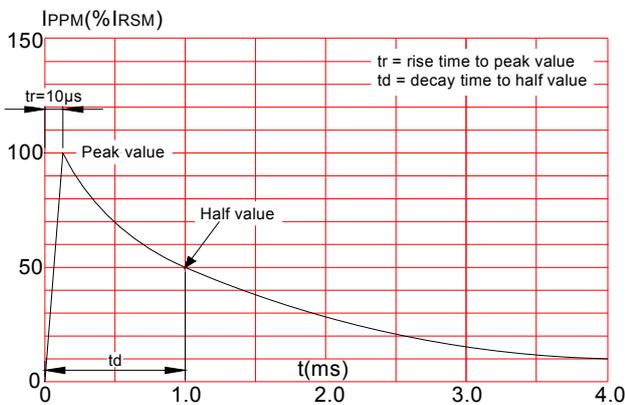


FIG.4: Pulse derating curve

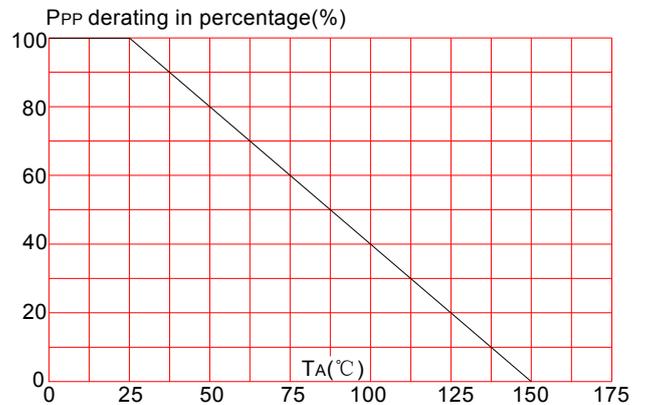


**SOLDERING PARAMETERS**

Reflow Condition		Pb-Free assembly (see FIG.5)
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	+150°C
	-Temperature Max( $T_{s(max)}$ )	+200°C
	-Time (Min to Max) ( $t_s$ )	60-180 secs.
Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak)		3°C/sec. Max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature( $T_L$ )(Liquidus)	+217°C
	-Temperature( $t_L$ )	60-150 secs.
Peak Temp ( $T_p$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		20-40 secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp ( $T_p$ )		8 min. Max
Do not exceed		+260°C

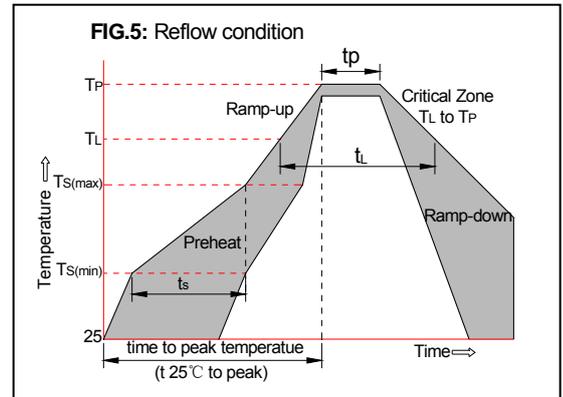


**PACKAGE MECHANICAL DATA**

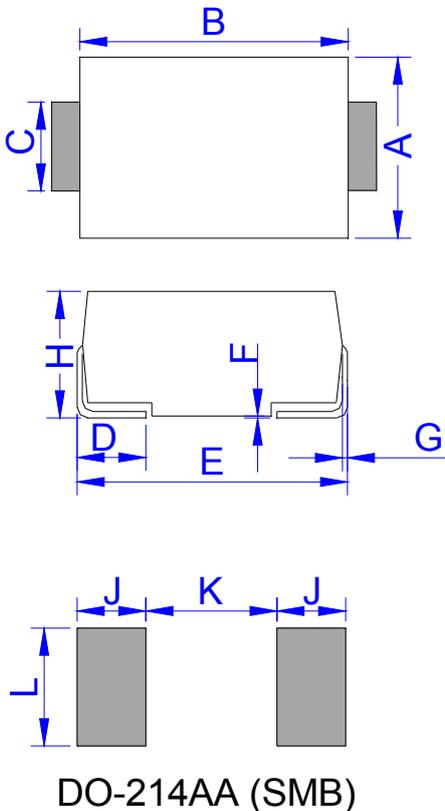

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.30	3.94	0.130	0.155
B	4.30	4.80	0.169	0.189
C	1.90	2.20	0.075	0.087
D	0.95	1.52	0.037	0.060
E	5.20	5.60	0.205	0.220
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.10	2.40	0.083	0.094
J	2.20		0.087	
K		2.60		0.102
L	2.30		0.091	

TAPE AND REEL SPECIFICATION-SMB

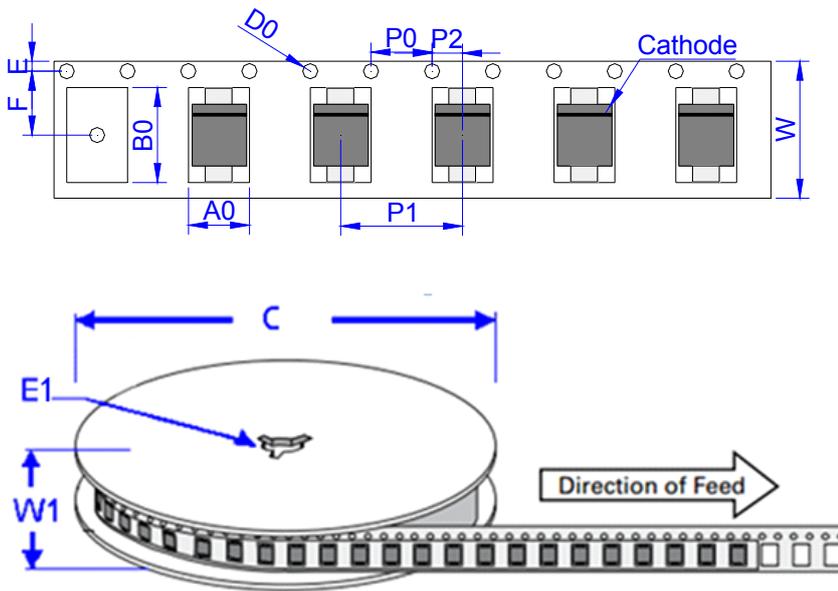

Ref.	Dimensions	
	Millimeters	Inches
A0	3.76 ± 0.3	0.148 ± 0.012
B0	5.69± 0.3	0.224 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524± 0.012
F	5.5 ± 0.2	0.217 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	12.0± 0.2	0.472 ± 0.008
W1	15.7 ± 2.0	0.618 ± 0.079

OUTLINE	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)
TAPING	0.098	3,000	48,000	330

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the fourth version which is made in 3-July-2017. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2017Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.