
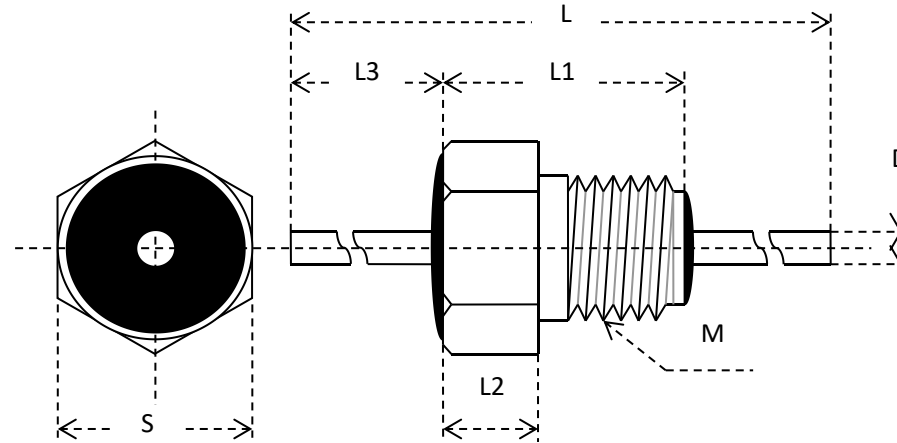


螺纹式陶瓷馈通电容器
KTL-MXX型 (2.5/3.0/4.0/5.0/6.0/8.0)

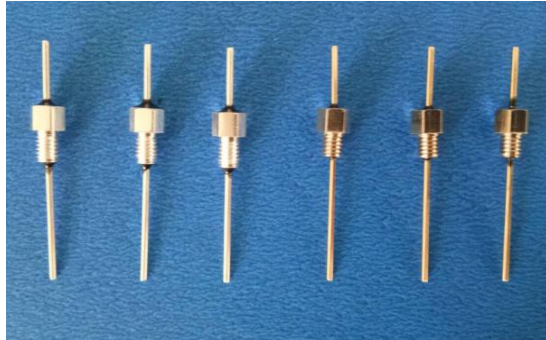

型号	尺寸 (mm)							电性能			材料		
	S	L	L1	L2	L3	M	D	容量范围	电压范围	电流范围	介质材料	外壳材料	引线材料
L3325A	3.3	20	6.6	3	10	2.5*0.45	0.8	10pF~5nF	50~1KVDC	1~7AH	陶瓷	铜镀银	铜镀银
L3325B	3.3	30	6.6	3	8	2.5*0.45	0.8	10pF~5nF	50~1KVDC	1~7AH	陶瓷	铜镀银	铜镀银
L4030A	4	30	7	3	10	3*0.5	0.8	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀银	铜镀银
L4030B	4	30	6	3	10	3*0.5	0.8	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀金
L4030C	4	30	6	3	10	3*0.5	0.8	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L4030D	4	20	6	3	7	3*0.35	0.8	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L4030E	4	24	6	2.5	14	3*0.5	0.8	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L6040A	6	28	7.5	3.5	10	4*0.7	1	10pF~100nF	50~1KVDC	1~10AH	陶瓷	铜镀银	铜镀银
L6040B	6	30	7.5	3.5	9	4*0.7	0.8	10pF~100nF	50~1KVDC	1~7AH	陶瓷	铜镀银	铜镀银
L6040C	6	28	8.5	2.5	10	4*0.7	1	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L5040A	5	30	17	6	8	4*0.7	0.8	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L5040B	5	30	9	2.5	8	4*0.7	0.8	10pF~10nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L6050B	6	28	10	4	10	5*0.8	1	10pF~100nF	50~1KVDC	1~10AH	陶瓷	铜镀镍	铜镀银

L6050C	6	30	10	4	8	5*0.8	0.8	10pF~100nF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L8050A	8	54	10	6	12	5*0.8	0.8	10pF~2nF	50~2KVDC	1~7AH	陶瓷	铜镀镍	铜镀银
L8050B	8	28	9.2	4.2	10	5*0.8	1	10pF~1uF	50~1KVDC	1~10AH	陶瓷	铜镀镍	铜镀银
L8050D	8	33	9.2	4.2	8	5*0.8	0.8	10pF~1uF	50~1KVDC	1~7AH	陶瓷	铜镀镍	铜镀金
L8060A	8	35	11	6	10	6*1.0	1.5	10pF~100nF	50~2KVDC	1~20AH	陶瓷	铜镀银	铜镀银
L8060B	8	28	9	4	10	6*1.0	1	10pF~1uF	50~1KVDC	1~10AH	陶瓷	铜镀镍	铜镀银
L8060D	8	37	16	8	10	6*0.75	1.5	10pF~10nF	50~2KVDC	1~20AH	陶瓷	铜镀银	铜镀银
L12060A	12	35	11.5	6.5	10	6*0.75	1.5	10pF~5nF	50~2KVDC	1~20AH	陶瓷	铜镀镍	铜镀银
L7060A	7	30	8.5	3.5	13	6*0.5	0.8	10pF~100nF	50~1KVDC	1~7AH	陶瓷	铜镀银	铜镀银
L10080A	10	35	13.5	6.5	10	8*0.75	1.5	10pF~10nF	50~2KVDC	1~20AH	陶瓷	铜镀镍	铜镀银
L10080B	10	35	13.5	6.5	10	8*0.75	2.5	10pF~10nF	50~2KVDC	1~30AH	陶瓷	铜镀镍	铜镀银

所有型号系列都可以按照提供的范围选择需要的电容量，耐压等！一般的工作温度范围是-20° C-85° C,特殊需求可以订制！
 深圳市天美兴科电子有限公司 ch9305@126.com