

4

3


2

1

REVISIONS				
REV/	NUMBER	DESCRIPTION	DWN	CHK
A		DESIGN		

D

Kinghelm®

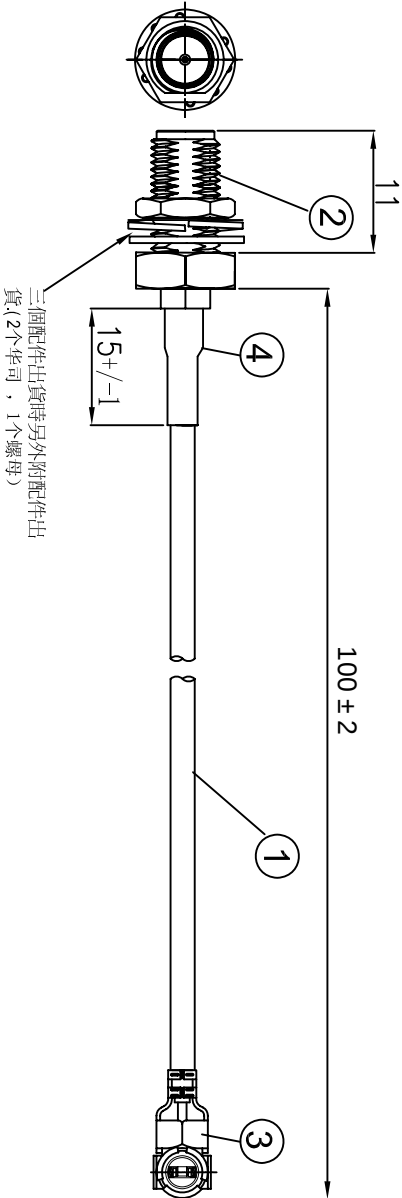

C

NOTES:

1. ELECTRICAL:

1.1. VOLTAGE RATING:DCV 300V 10MS

1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.

1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.

1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST

1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES

2. MATERIAL:

2.1. SEE TABLE

3. MECHANICAL:

3.1. SMA PULL FORCE: 12.0KGS.

4. ALL COMPONENTS ARE RoHS COMPLIANT.

B

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX, 1.13端子, 镀金	1
②	接头	SMA母头内针, 分体, 11牙, 镀金	1
①	同轴线	RF 1.13灰色线,OD:1.13mm	AS

B

金 航 标 电 子 有 限 公 司

ALL DIMENSION ARE IN MM	DRAWN	DATE	TITLE
ENG.	Jamy	2018 /05 /04	RF CABLE

COMPUTER GENERATED IN SOLIDWORKS	MFG.	I-PEX 1.13 TO SMA /F L=200 MM
DO NOT SCALE THIS DRAWING	Q.A.	

A

PROJECTION	GENERAL TOLERANCE FOR ANGLES	SIZE	REV
	XX XX XXX XXXX ± 1° ± 0.3 ± 0.25 ± 0.150	Number	A

4

3

2

1

CUSTOMER P/N:

SCALE: Free	TYPE	SHEET 1 OF 1
-------------	------	--------------

A