



MUR1660(F)CT

Ultrafast Recovery Planar Diode
Reverse Voltage 600 Volts Forward Current 16 Amperes

Features

- FRED (Planar) wafer construction
- Ultrafast recovery time
- Low forward voltage drop, low power losses
- High efficiency operation
- Plastic package has underwriters Laboratory Flammability Classification 94V-0




Package: ITO-220-AB



Package: TO-220-AB

Mechanical Data

- Case: Epoxy, Molded
- Weight: 1.9grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 sec
- Shipped 50 units per plastic tube

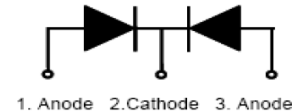

Maximum Ratings & Electrical Characteristics

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER		TEST CONDITIONS		SYMBOL	MUR1660(F)CT	UNIT
Maximum repetitive peak reverse voltage				V_{RRM}	600	V
Working peak reverse voltage				V_{RWM}	600	V
Maximum DC blocking voltage				V_{DC}	600	V
Maximum average forward rectified current at $T_c=105^{\circ}\text{C}$ total device per diode				$I_F(AV)$	16 8	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode				I_{FSM}	125	A
Voltage rate of change (rated V_R)				DV/dt	10000	V/us
Operating junction temperature range				T_J	-55 to +150	$^{\circ}\text{C}$
Storage temperature range				T_{STG}	-55 to +150	$^{\circ}\text{C}$
Maximum Reverse Recover Time ($I_F=0.5\text{Amp}$, $I_R=1.0\text{Amp}$, $I_{rec}=0.25\text{Amp}$)		T_{rr}		T_{rr}	50	ns
Maximum instantaneous forward voltage per leg		$I_F=8\text{A}$ $I_F=8\text{A}$	$T_C=25^{\circ}\text{C}$ $T_C=125^{\circ}\text{C}$	V_F	1.50 1.40	V
Maximum reverse current per leg at working peak Reverse voltage			$T_J=25^{\circ}\text{C}$ $T_J=100^{\circ}\text{C}$	I_R	10 500	μA
Thermal Characteristics $T_A=25^{\circ}\text{C}$ unless otherwise noted						
Symbol	Parameter	TYP (TO-220-AB)		TYP (ITO-220-AB)		Unit
R θ JC	Thermal Resistance, Junction to Case per Leg	2.0		4.0		$^{\circ}\text{C}/\text{W}$
R θ JA	Thermal Resistance, Junction to Ambient per Leg	62.5		62.5		$^{\circ}\text{C}/\text{W}$

Note: Pulse test: 300us pulse width, duty cycle=2%



MUR1660(F)CT

Ultrafast Recovery Planar Diode

Reverse Voltage 600 Volts Forward Current 16 Amperes

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

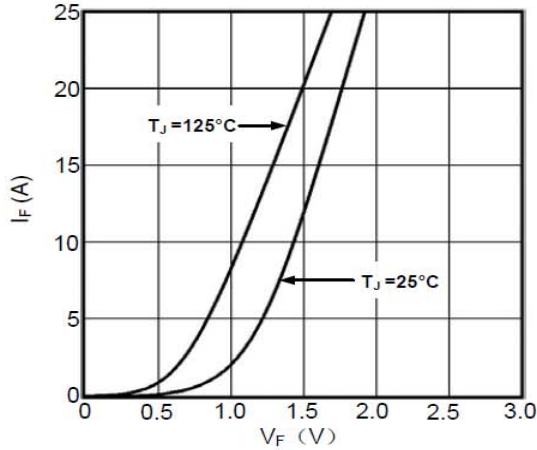


Fig1. Forward Voltage Drop vs Forward Current

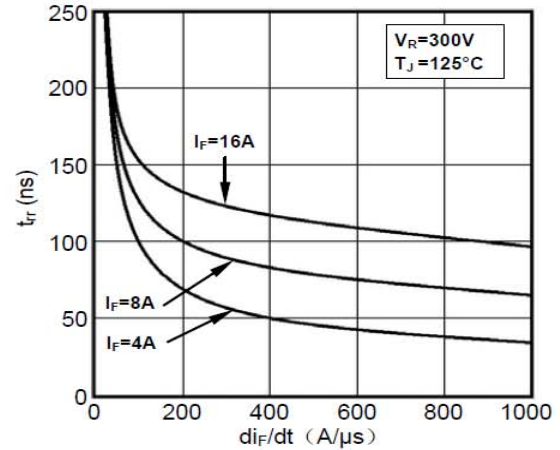


Fig2. Reverse Recovery Time vs di_F/dt

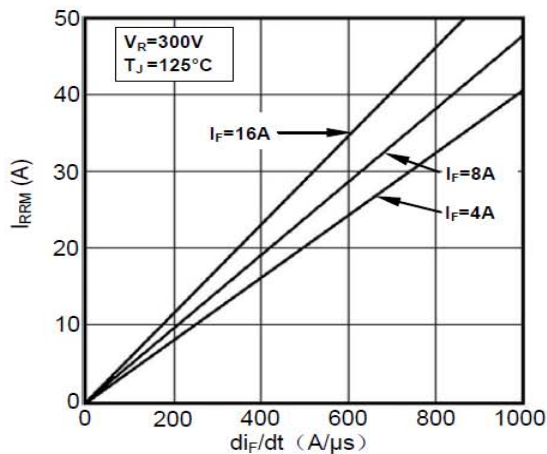


Fig3. Reverse Recovery Current vs di_F/dt

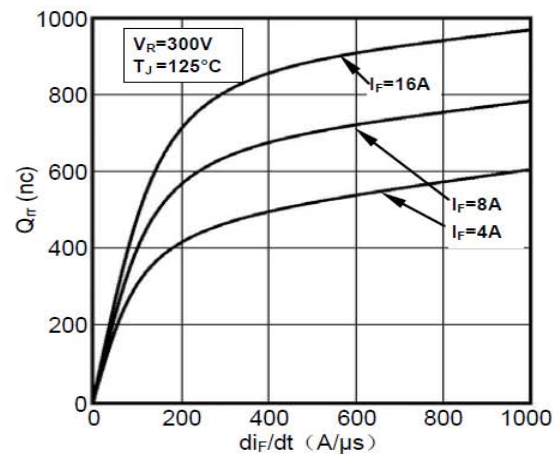


Fig4. Reverse Recovery Charge vs di_F/dt

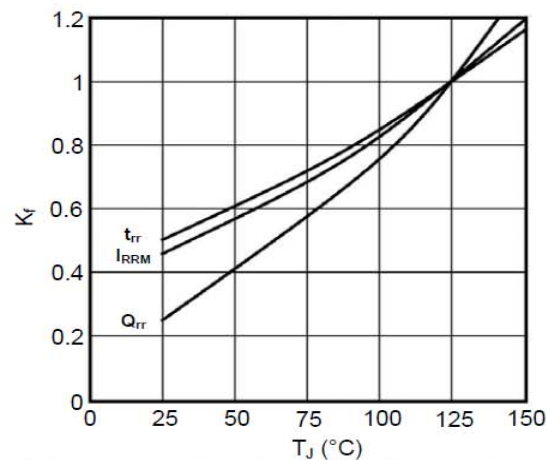


Fig5. Dynamic Parameters vs Junction Temperature

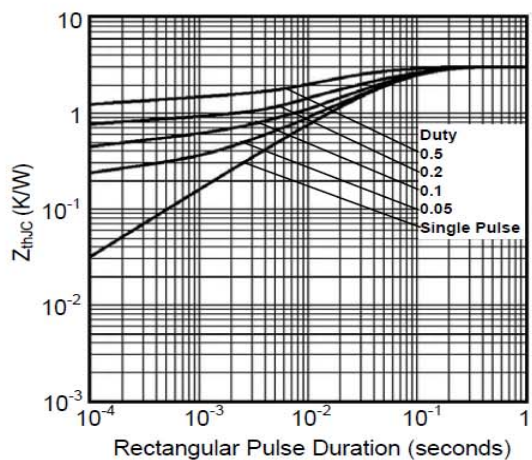


Fig6. Transient Thermal Impedance



MUR1660(F)CT


Ultrafast Recovery Planar Diode

Reverse Voltage 600 Volts Forward Current 16 Amperes


Package Outline Dimensions

Unit: millimeters

TO-220-AB

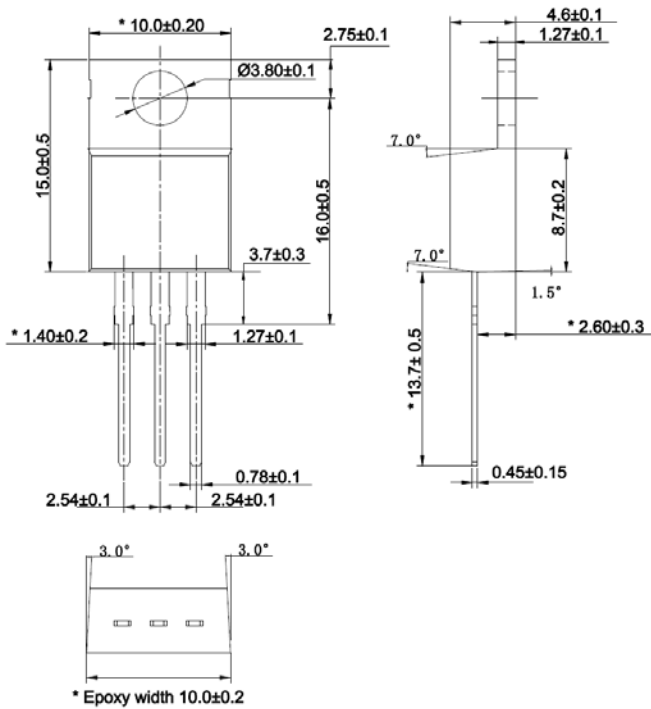

ITO-220-AB

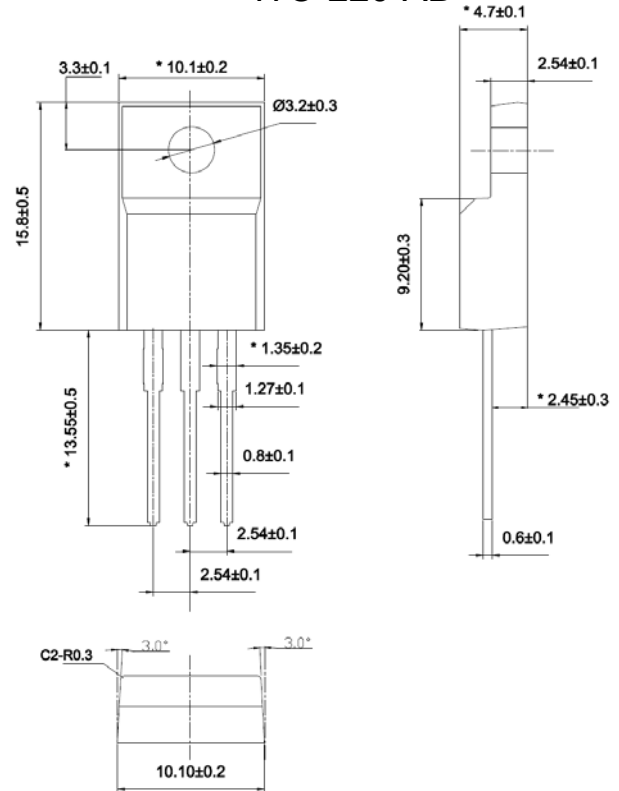



MUR1660(F)CT

Ultrafast Recovery Planar Diode
Reverse Voltage 600 Volts Forward Current 16 Amperes

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Goo-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.
(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.