



VOLTAGE RANGE: 100V
CURRENT: 3.0 A

Features

- Miniature Size, Surface Mount Device
- Low Forward Voltage Drop
- High Surge Capability
- Low Power Loss, High Efficiency
- Packaged in 12mm Tape and Reel
- Not Rolling During Assembly

Mechanical Data

- Case: SMB/DO-214AA, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.093 grams (approx.)

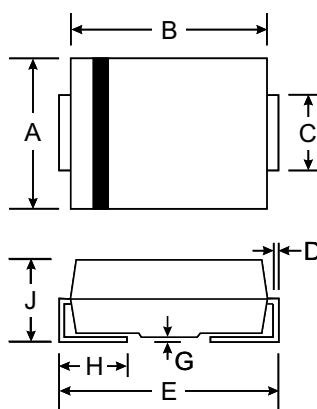

SMB(DO-214AA)		
Dim	Min	Max
A	3.30	3.94
B	4.06	4.70
C	1.91	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Limits	Unit
Repetitive Peak Reverse Voltage	V _{RRM}	100	V
Average Rectified Output Current 50Hz Half Sine Wave Resistive Load T_A=26°C * 1 T₁=84°C	I _O	1.3 3.0	A
R.M.S. Forward Current	I _{F(RMS)}	4.71	A
Surge Forward Current 50Hz Half Sine Wave, I _c cycle, Non-repetitive	I _{FSM}	60	A
Operating Junction Temperature Range	T _{jw}	-40 to +150	°C
Storage Temperature Range	T _{stg}	-40 to +150	°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Peak Reverse Current T _j = 25°C, V _{RM} = V _{RRM}	I _{RM}	-	-	2	mA
Peak Forward Voltage T _j = 25°C, I _{FM} = 3.0A	V _{FM}	-	-	0.85	V
Thermal Resistance Junction to Ambient Junction to Lead	R _{th(j-a)}	-	-	108	°C /W
	R _{th(j-l)}	-	-	23	