
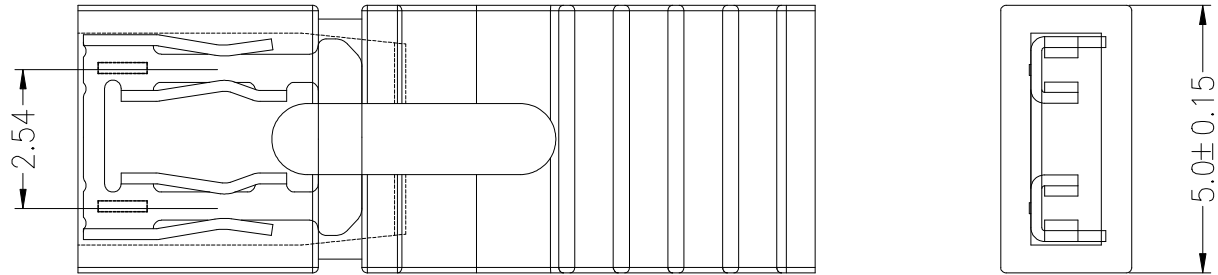


HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material: Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA66
 Max.Processing Temp: 180°C for 30-60 seconds
 (230°C for 10 seconds)

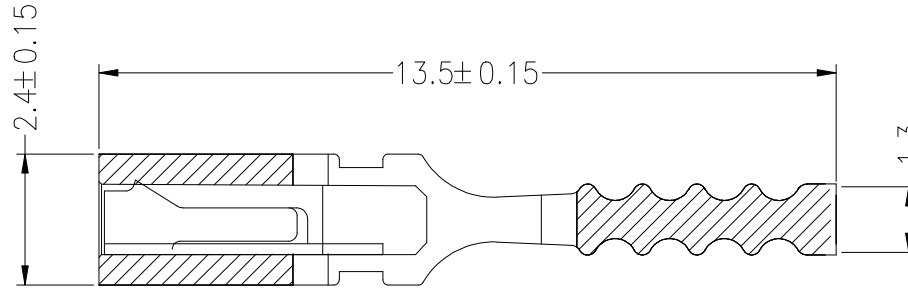

Ordering Information

3830 13 01 0 XX B 0X

Plastics Height
13=13.5mm

No.of Pins
01=Sing Type

Contact Plating
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 Ni:1U" Gold/Ni
 NN:Ni

Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow

OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL				TITLE:	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

PART NO.	383013010XXB0X
TITLE:	2.54 Mini Jumper H13.5 1*2Pin Open Type