



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃



Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 230℃±5℃ 5S

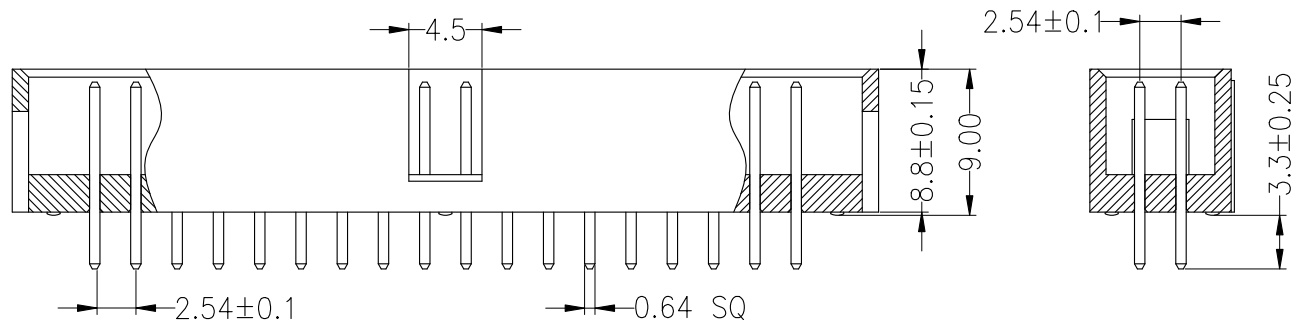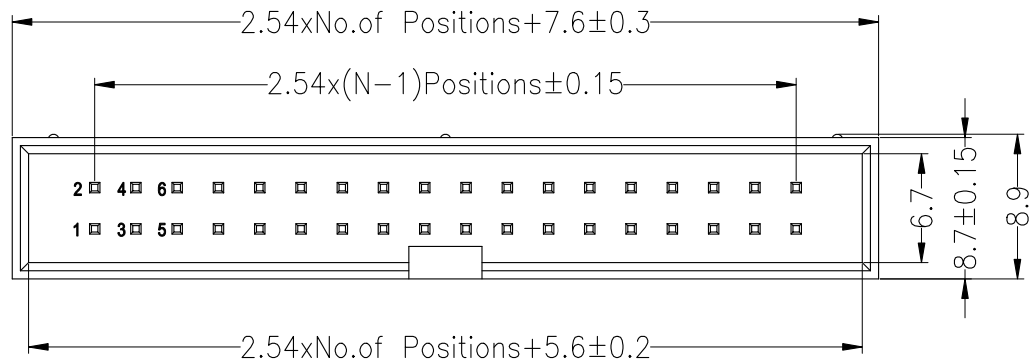

Ordering Information


3210 XX S XX A B K00 X 0X

No.of Pins
6--64

Contact Plating
G0:Gold Flash
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold
S0:Gold Flash/Tin
SN:Tin

Insulator Material
Option
A=PBT
C=PA6T
E=PA9T
F=LCP

Packing
T=Tube
A=Tray
P=Tube+Cap

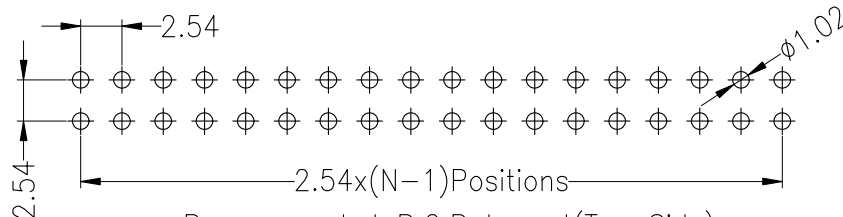

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	Jelly Feng	21.11.10	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4		
				X.XXX	±0.10				SHEET	1/1		
A0	2021.11.10	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	1/1	PART NO.	3210XXSXXABK00X0X
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL						TITLE:	2.54mm Box Header H8.8mm 180°