


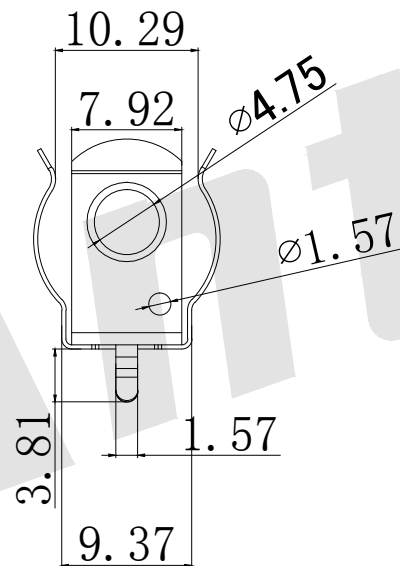


HSF

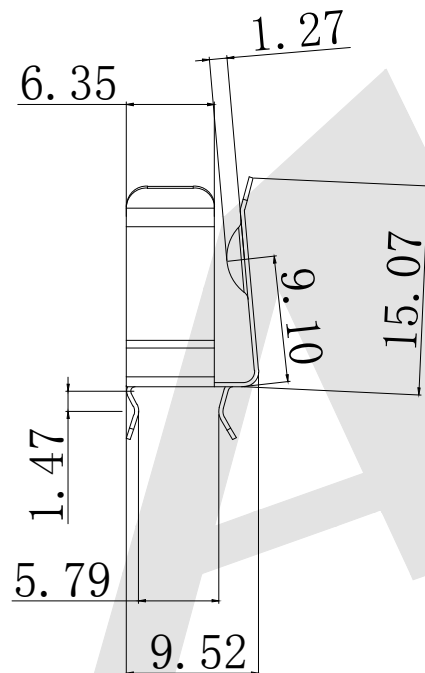

ROHS



MATERIAL:

0.008 (0.30) Pre-hardened and Nick Plated
Heat Treat T0 Spring Temper

Order Code:

BS	S	SI	R	CR134A
①	②	③	④	⑤

① BS: Battery Clip

③ Contact Plating

② Apperance For The Product

M: SMT TYPE

S: 180 TYPE

R: 90 TYPE

SN: Tin

G0: Gold flash

G1: 3U" Gold

G2: 5U" Gold

G3: 10U" Gold

G4: 15U" Gold

G5: 30U" Gold

SI: NICKEL Plated

④ Packing Method

A: Tray Packing


R: Tape & Reel Packing

B: Bag


⑤ Product Number:

CR134A

REQUIRED SPACING FOR "AA" CLIP

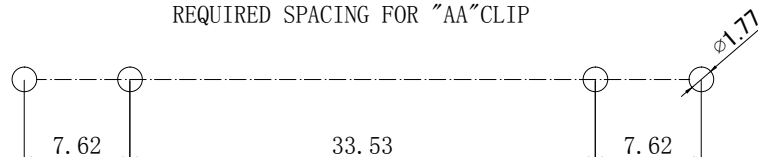

Unless Otherwise specified tolerance
X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE:
As ShownUNIT:
mmDRAW
Wu Feng RongDATE
23/03/2020CHECK
BobYangDATE
23/03/2020

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

"A"&"AA" PC BATTERY CLIP For CR134A

DRAWING NO:

BS-S-SI-R-CR134A

PRODUCT NO:

BS-S-SI-R-CR134A

REV

DESCRIPTION

DATE