

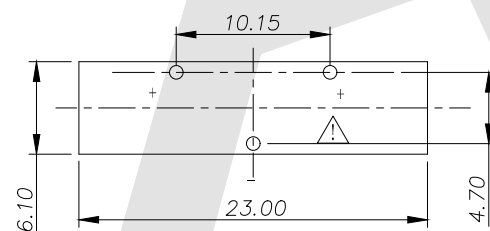


HSF

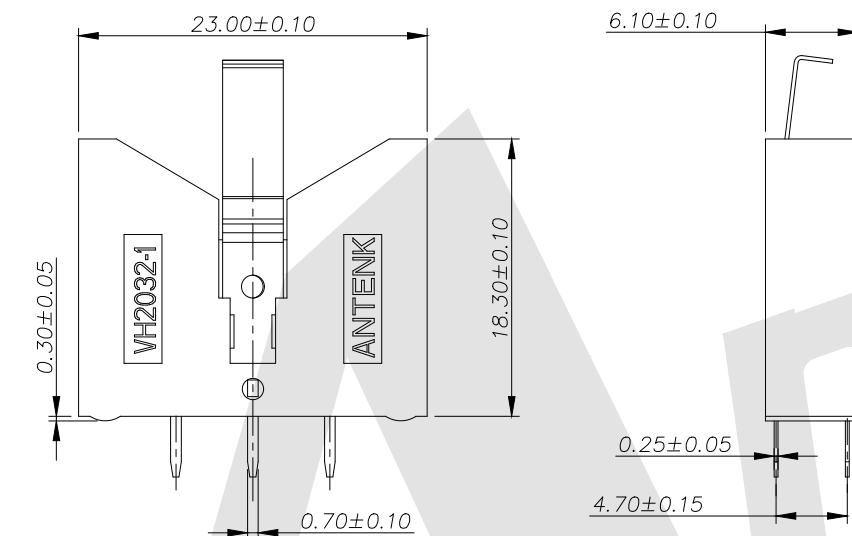

RoHS

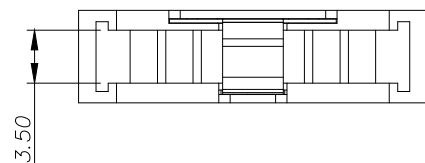

PCB LAYOUT (TOP VIEW)



NOTES:

1. Housing: PA66+30%G.F, Colr:Black, UL94V-0
2. Contact: Spring Stainless Steel, T=0.25mm
Plated Nickel Overall 5um Min;
3. Working Temp: -30° C to +70° C

Order code:

BT - S - SN - A - VH2032-1

① ② ③ ④ ⑤

① BT: Coin Cell Holders

② Apperance for the product
S:180 TYPE

③ Contact Plating

SN: Tin

NI: Nickel

G0: Gold flash

G1: 3U" Gold

G2: 5U" Gold

G3: 10U" Gold

G4: 15U" Gold

G5: 30U" Gold

④ Packing method

A: Tray packing

R: Tape & reel
packing

⑤ Product number

VH2032-1

Unless Otherwise specified tolerance

X. ±0.38

X.XX: ±0.20

X.X: ±0.25

X.XXX: ±0.10

SCALE:

As Shown

UNIT:

mm

DRAW

Wu Feng Rong

DATE

11/17/2020

CHECK

BobYang

DATE

11/17/2020



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

Coin Cell Holders For CR2032 Vertical DIP Type

DRAWING NO: BT-S-SN-A-VH2032-1

PRODUCT NO: BT-S-SN-A-VH2032-1

Change 90° to 180°

06/16/2022

Update TITLE

08/12/2021

Update NOTES

08/04/2021

Add "+ -" Electrodes

07/27/2021

DESCRIPTION

DATE

REV

1 2 3 4 5 6 7 8