

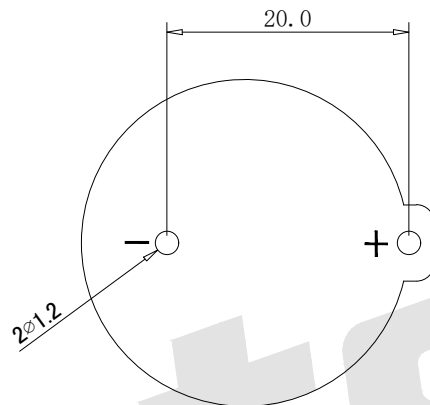


HSF

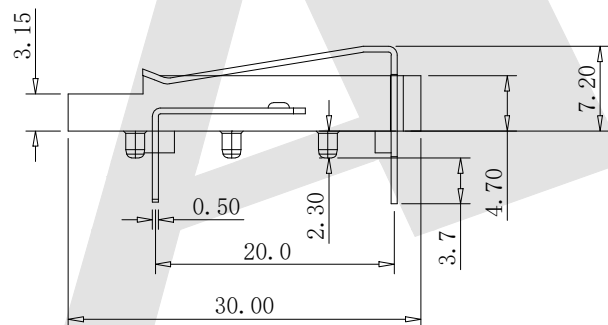

ROHS

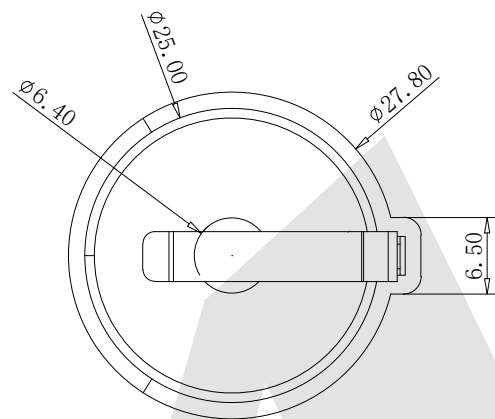

PCB HOLE LAYOUT

NOTE:

1, Material:

- a. Housing: PA BK V0 GF30.15
b. Contact: Manganese Steel Δ
(Surface Plating: Sn 10u")
See Ordering Information

2, Electric:

- a. Contact Resistance: 30 Milliohms Max
b. Insulation Resistance: 1000 MEGA OHMS Min
c. Dielectric Voltage: 500V AC One Sea Level
d. Operating Temperature: -55° To 105°


Order code:

BT — S — SN — R — CR2450D
① ② ③ ④ ⑤

- ① BT: Coin Cell Holders
② Appearance for the product
S: 180 TYPE


- ③ Contact Plating
SN: Tin
G0: Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold

- ④ Packing method
A: Tray packing
R: Tape & reel packing
⑤ Product number
CR2450D

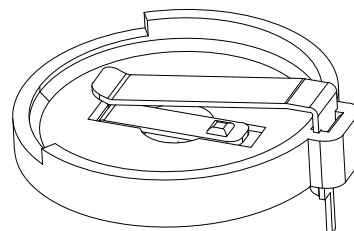

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Lv Xun Hua DATE 17/04/2019
CHECK BobYang DATE 17/04/2019



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: Coin Cell Holders For CR2450D

DRAWING NO: BT-S-SN-R-CR2450D

PRODUCT NO: BT-S-SN-R-CR2450D

 Δ Revise Contact Material

08/19/2022

 Δ Revise Dimension Depend Sample

07/02/2022

REV DESCRIPTION

DATE

1

2

3

4

5

6

7

8