


HSF



RoHS

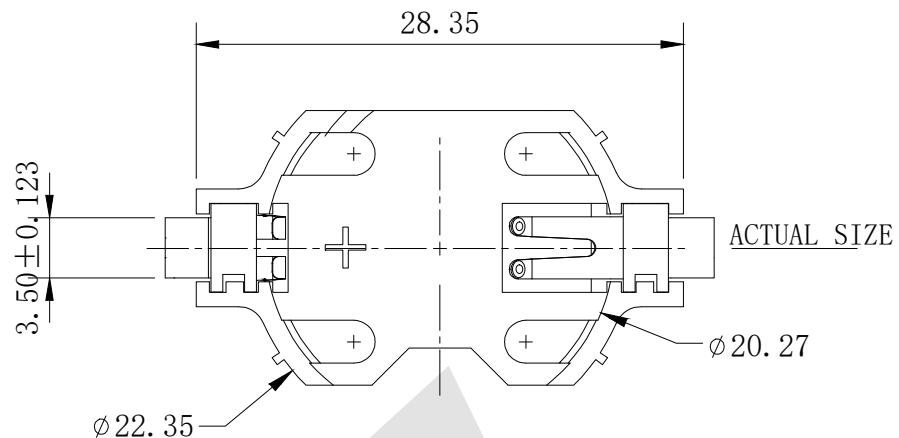

POSITIVE CONTACT P/N F1058-2
SOLDER TAIL
CONTACT SURFACE
HOUSING P/N F1058
NEGATIVE CONTACT P/N F1058-1

0.127 A

31.90±0.38

31.9 MIN

3,51


8,25

7

2,54

ZONE FOR OPTIONAL
ADHESIVE FIXATION

PCB LAYOUT

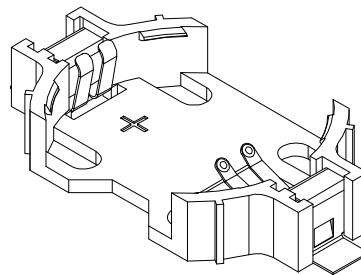

NOTES:

1. BASE:

MAT'L-LCP 30% GLASS FILLED
UL94V-0

2. CONTACTS:

MAT'L-0.152 TH'K PHOSPHOR BRONZE
FINISH:GOLD FLASH 0.0000762 OVER
0.00127-0.00254 NICKEL
ON CONTACT SURFACE AND SOLDER TAIL
BALANCE OF PART 0.0000254 MIN. GOLD,
OVER NICKEL PLATE

Order code:


BT — M — GO — R — CR1058B
① ② ③ ④ ⑤

① BT:Coin Cell Holders ③ Contact Plating
SI: NICKEL Plated
SN: Tin
GO:Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
② Apperance for the
product
M:SMT TYPE

④ Packing method
A: Tray packing
R: Tape & reel packing
⑤ Product number
CR1058B

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
UNIT:
mm
DRAW
Wu Feng Rong
DATE
02/08/2019
CHECK
BobYang
DATE
02/08/2019



Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
Coin Cell Holders For CR2032

DRAWING NO: BT-M-GO-R-CR1058B

PRODUCT NO: BT-M-GO-R-CR1058B

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8