







HSF



ROHS



SECTION A-A

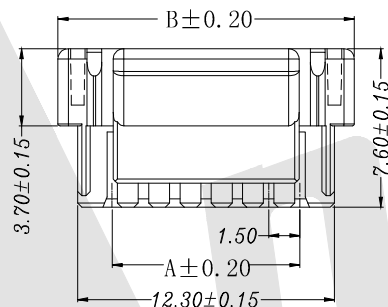

Specifications:

Current rating:2A AC,DC (AWG #24)

Voltage rating:100V AC,DC

Temperature range: -25°C to +85°C
(including temperature rise in applying electrical current)

Contact resistance: Initial value/30mΩ max.

After environmental testing/60mΩ max.

Insulation resistance:500MΩ min.

Withstanding voltage:500V AC/minute

Housing:

Part NO.:AH1504-2xNP

Material:Pa66, UL94V-0

Mates with: AT1504 series Terminal

Circuits	PART No.	Dimensions (mm)	
		A	B
10	AH1504-2x5P	6.0	11.2
12	AH1504-2x6P	7.5	12.7
14	AH1504-2x7P	9.0	14.2
16	AH1504-2x8P	10.5	15.7
18	AH1504-2x9P	12.0	17.2
20	AH1504-2x10P	13.5	18.7
22	AH1504-2x11P	15.0	20.2
24	AH1504-2x12P	16.5	21.7
26	AH1504-2x13P	18.0	23.2
28	AH1504-2x14P	19.5	24.7
30	AH1504-2x15P	21.0	26.2

Unless Otherwise specified tolerance


X. ±0.35 X.XX: ±0.20

X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 10/05/2022

CHECK BobYang DATE 10/05/2022



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

1.50mm pitch ZPD Housing Connector Series

DRAWING NO: AH1504-2xNP

PRODUCT NO: AH1504-2xNP

REV

DESCRIPTION

DATE