

HSF



RoHS

SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 1000MΩ min
Contact Resistance: 20MΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

BHAS02 - X - X - X - X - X - A - C
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts

06 08 10 14 16
20 24 26 30 32
34 40 44 50 60
64 80 100

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Color Insulator

B:Black
U:Blue
W:White

⑤ Insulator Material



B:PA6T
C:LCP
E:PA9T

⑥ Packing



A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

⑦ Dimension option:

A:0250=2.50mm
C:0800=8.00mm

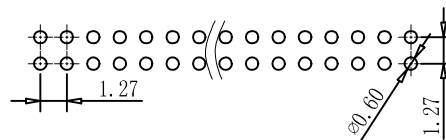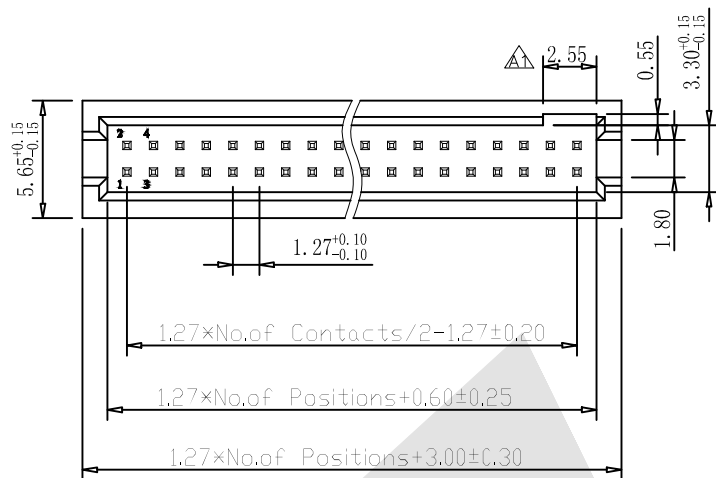

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

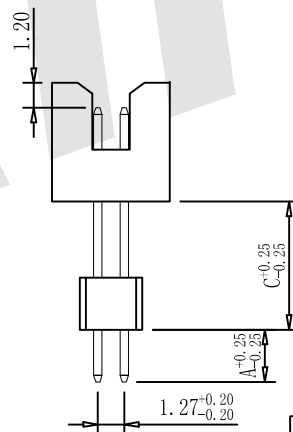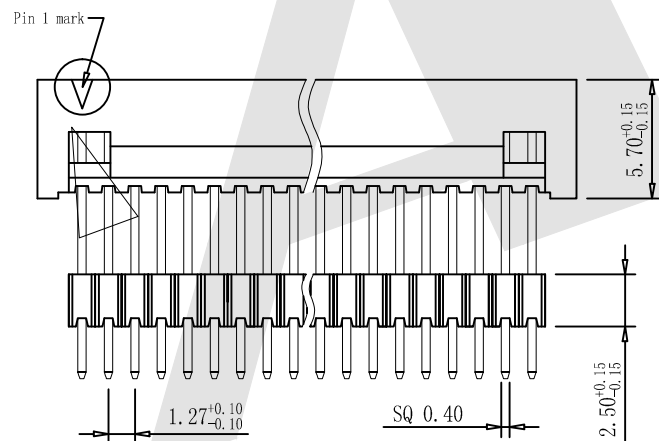

Dimension antitheses List

ITEM	A	C
Standard	2.50	8.00
Alternate		

Standard IE P/N :

BHAS02-10-G0-B-B-0250-0800

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

YG ZHONG

DATE


01/05/2016

CHECK

BobYang

DATE

01/05/2016



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

1.27mm Box Header 180° H=5.70 Add Housing

DRAWING NO:

BHAS02-XXXXX

PRODUCT NO:

BHAS02-XXXXX

REV

DESCRIPTION

DATE