

HSF



RoHS

SPECIFICATION:

Current Rating:	1Amp
Insulation Resistance:	1000M Ω min
Contact Resistance:	20M Ω max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40° C to +105° C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0

Ordering Code:

BHAM08 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

06 08 10 14 16
20 24 26 30 32
34 40 44 50 60
64 80 100

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Color Insulator




B:Black
U:Blue
W:White

⑤ Insulator Material

B:PA6T
C:LCP
E:PA9T

⑥ Packing

A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

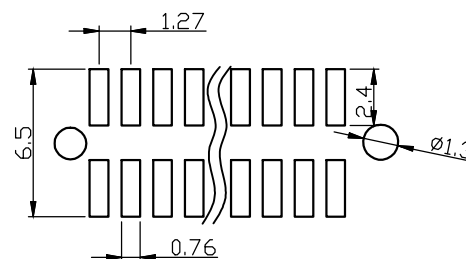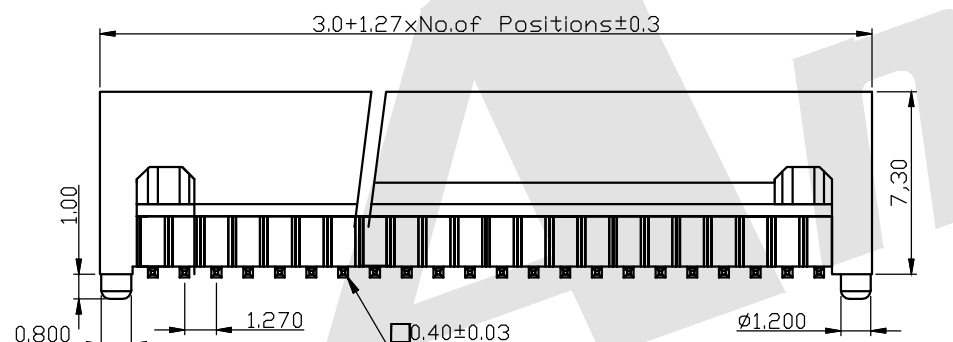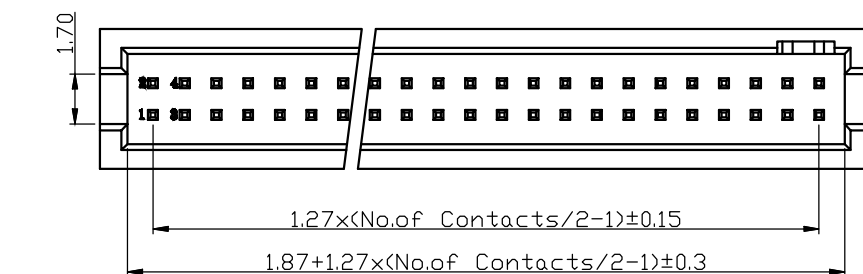

P.C.B Hole Layout

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Mo Guo Xuan

DATE

10/01/2019

CHECK

BobYang

DATE

10/01/2019



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 1.27mm Box Header SMT With
post,High Profile

DRAWING NO: BHAM08-XXXXXXX

PRODUCT NO: BHAM08-XXXXXXX

REV

DESCRIPTION

DATE