

HSF



SPECIFICATION





Current Rating:	1Amp
Insulation Resistance:	1000M Ω min
Contact Resistance:	20M Ω max
Withstand Voltage	500V AC/DC
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0
Operating Temperature:	-40° C to +105° C

Available For Poles at Present: 
4P, 10P, 12P, 20P, 22P, 24P, 26P, 30P, 40P, 44P

Ordering Code:

BHAS04 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$

- | | |
|--------------------------------|----------------------|
| ① Series No: | ④ Color Insulator |
| ② No. of Contacts | B:Black |
| 10-100P | U:Blue |
| | W:White |
| ③ Contact Plating: | ⑤ Insulator Material |
| G0:Gold flash S0:Selective | B:PA6T |
| G1:3u" Gold S1:Selective 3u" | C:LCP |
| G2:5u" Gold S2:Selective 5u" | E:PA9T |
| G3:10u" Gold S3:Selective 10u" | ⑥ Packing |
| G4:15u" Gold S4:Selective 15u" | A:Tray |
| G5:30u" Gold S5:Selective 30u" | B:Bag |
| SN:Tin | T:Tube |
| | U:Tube+CAP |
| | R:Tape&Reel |
| | W:Tape&Reel+CAP |

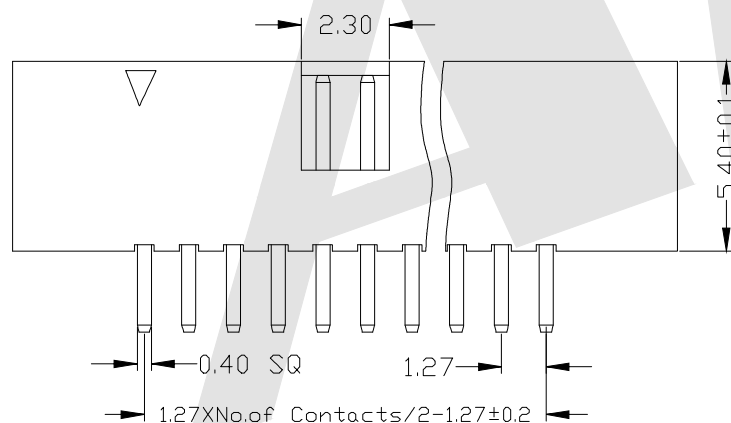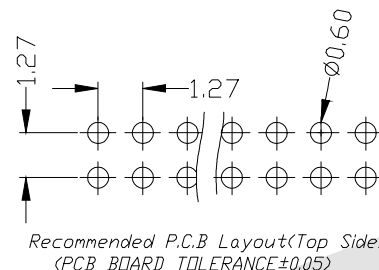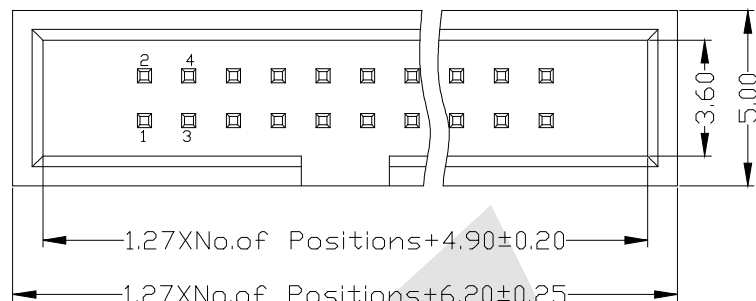

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown
DRAW
YG ZHONG
CHECK
BobYang

UNIT:
mm
DATE
01/05/2016
DATE
01/05/2016



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Box Header 180° ,H=5.4mm

DRAWING NO: BHAS04-XXXXXX

PRODUCT NO: BHAS04-XXXXXX



Available For Poles at Present

11/09/2020

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8