

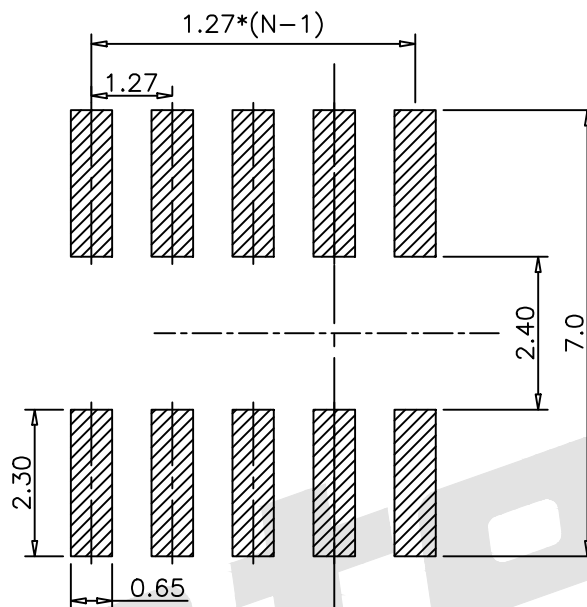



HSF

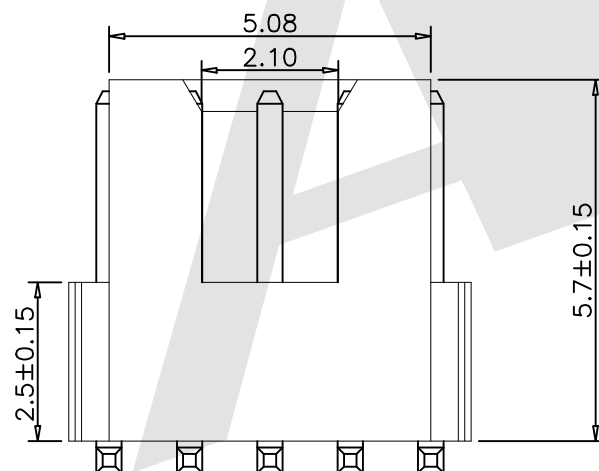

ROHS

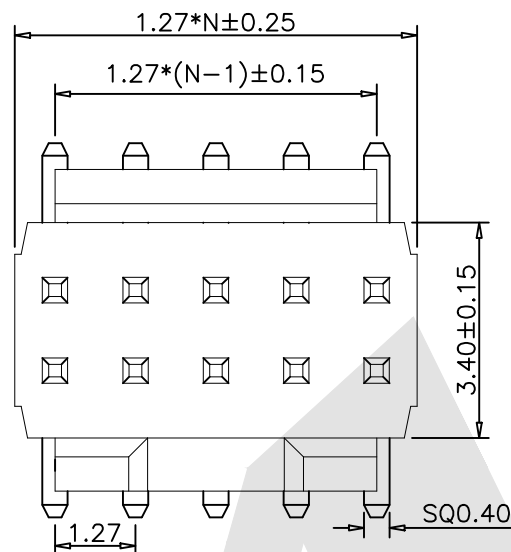

TOLERANCE: ± 0.05 , THICKNESS: 1.2mm
RECOMMENDED PCB LAYOUT (TOP VIEW)

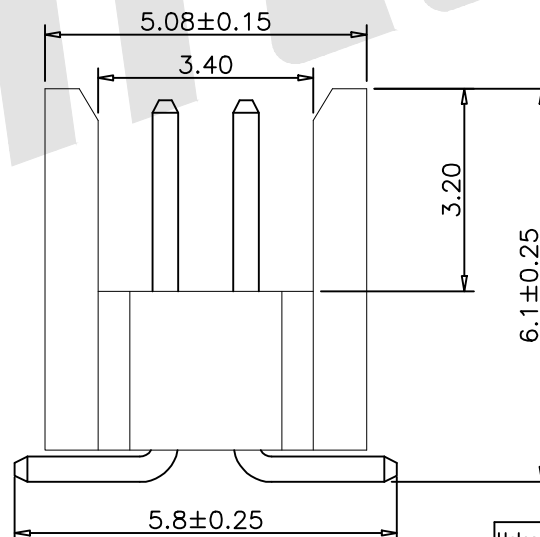

Technical Parameters
Accord With Norm: EIA-364C
Current Rating: 1AMP
Insulator Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Voltage Resistance: AC 500V
Operating Temperature: -40°C TO $+105^{\circ}\text{C}$
Metallic Material: Brass
Metal Treatment: Ni+Au
Insulator Material: LCP+30%GF UL94V-0
Resistance To Soldering Heat: $280^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 10S MAX

Ordering Code:

BHAM07 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

10PIN, 12PIN, 14PIN, 20PIN

③ Contact Plating:

G0: Gold flash S0: Selective
G1: 3U" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin

④ Color Insulator

B: Black
U: Blue
W: White

⑤ Insulator Material

B: PA6T
C: LCP

⑥ Packing

A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

Unless Otherwise specified tolerance
X.XX: ± 0.20
X.X: ± 0.25
X.XXX: ± 0.15

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 08/06/2022

CHECK BobYang DATE 08/06/2022



3rd ANGLE PROJECTION

Antenk® ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

1.27*1.27MM BOX HEADER WITH THE KEY,
SMT H=2.54MM

DRAWING NO: BHAM07-XG0BBW

PRODUCT NO: BHAM07-XG0BBW

A1

REV

Add 12PIN

12/23/2022

DESCRIPTION

DATE