




SHENZHEN MENGKE ELECTRONICS TECHNOLOGY CO.,LTD

TO-252/TO-251 Plastic-Encapsulate Transistors

2SB772

TRANSISTOR (PNP)

Equivalent Circuit:

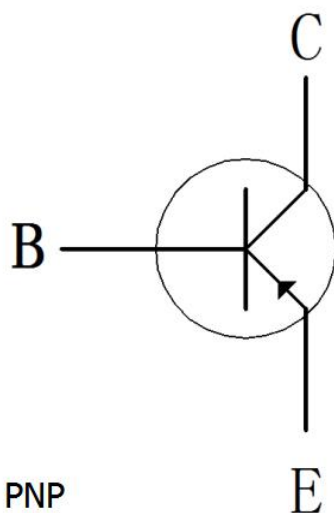


FEATURES:

- power switching applications

MARKING:

B772 MK XX

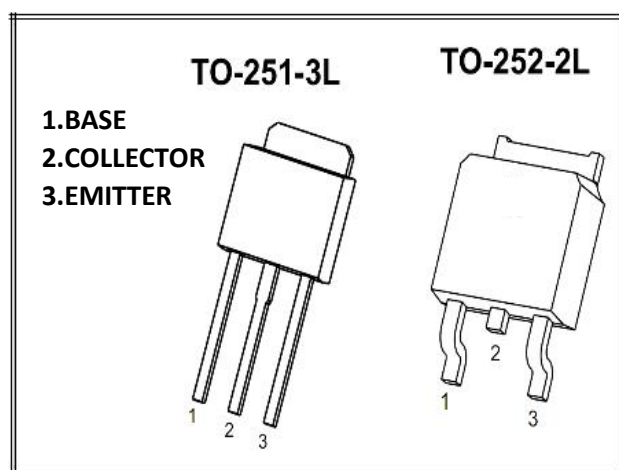

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	VCBO	-40	V
Collector-Emitter Voltage	VCEO	-30	V
Emitter-Base Voltage	VEBO	-6	V
Collector Current -Continuous	IC	-3	A
Collector Current -Pulsed	ICM	2	A
Collector Power Dissipation	PC	1.25	W
Thermal Resistance From Junction To Ambient	ROJA	125	°C/W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55~+150	°C

**ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)**

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-base breakdown voltage	V(BR)CBO	IC= -100μA, IE=0	-40			V
Collector-emitter breakdown voltage	V(BR)CEO	IC= -10mA, IB=0	-30			V
Emitter-base breakdown voltage	V(BR)EBO	IE= -100μA, IC=0	-6			V
Collector cut-off current	ICBO	VCB= -40 V , IE=0			-1	μA
Collector cut-off current	ICEO	VCB= -30V , IE=0			-10	μA
Emitter cut-off current	IEBO	VEB= -6V , IC=0			-1	μA
DC current gain	hFE	VCE= -2V, IC= -1A	60		400	
	hFE	VCE= -2V, IC=-500mA	100			
Collector-emitter saturation voltage	VCE(sat)	IC= -2A, IB= -0.2A			-0.5	V
Base-emitter saturation voltage	VBE(sat)	IC= -2A, IB= -0.2A			-2	V
Transition frequency	fT	VCE= -5V, IC= -0.1A f=1MHz	50	80		MHz
Fall time	tf	IC=-1A, IB1=-IB2=-0.2A VCC=100V			0.5	μs
Storage time	ts		1.5		4	μs

CLASSIFICATION OF hFE


Rank	R	O	Y	GR
Range	60-120	100-200	160-320	200-400



2SB772


SHENZHEN MENGKE ELECTRONICS TECHNOLOGY CO.,LTD

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

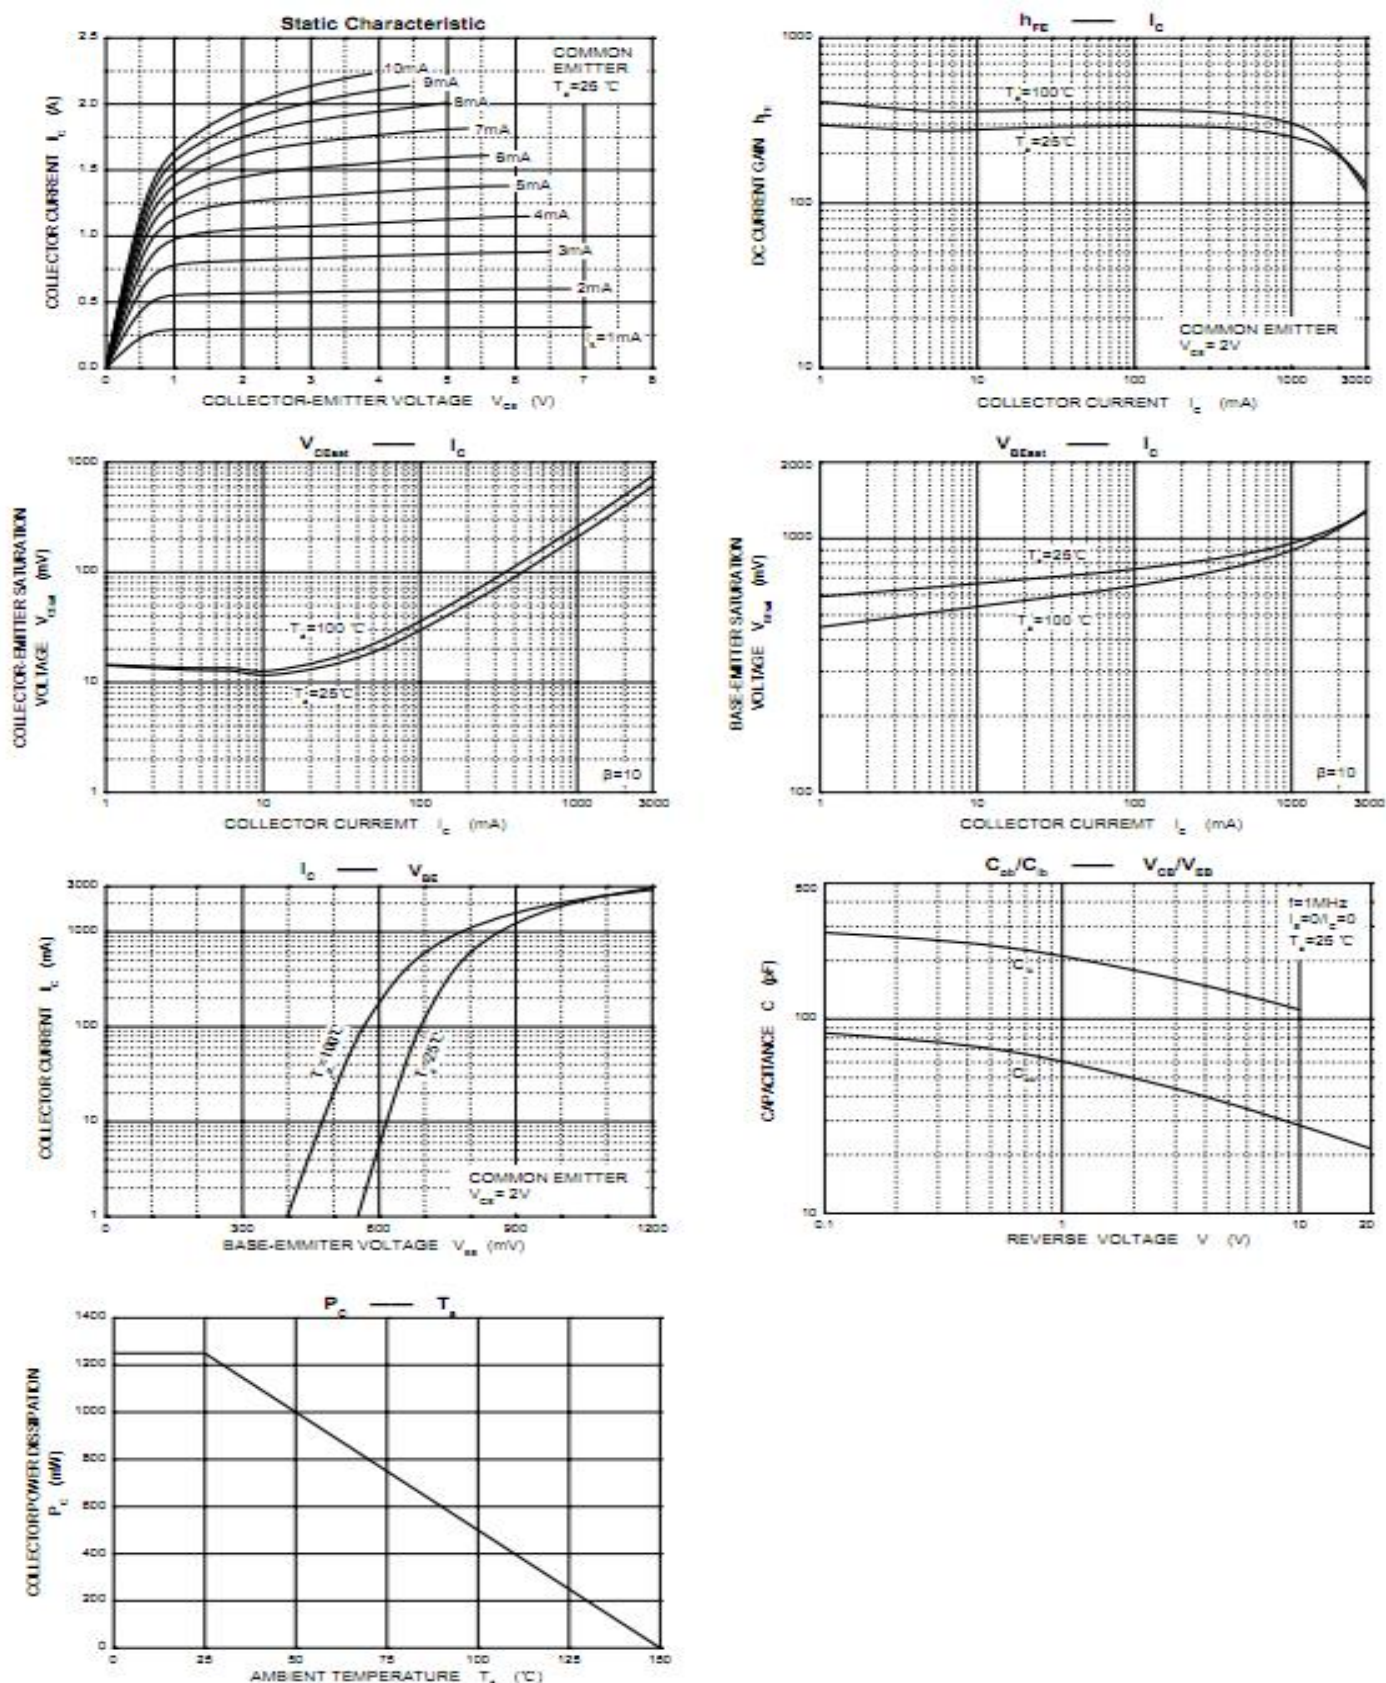



TO-252 PACKAGA OUTLINE DIMENSIONS

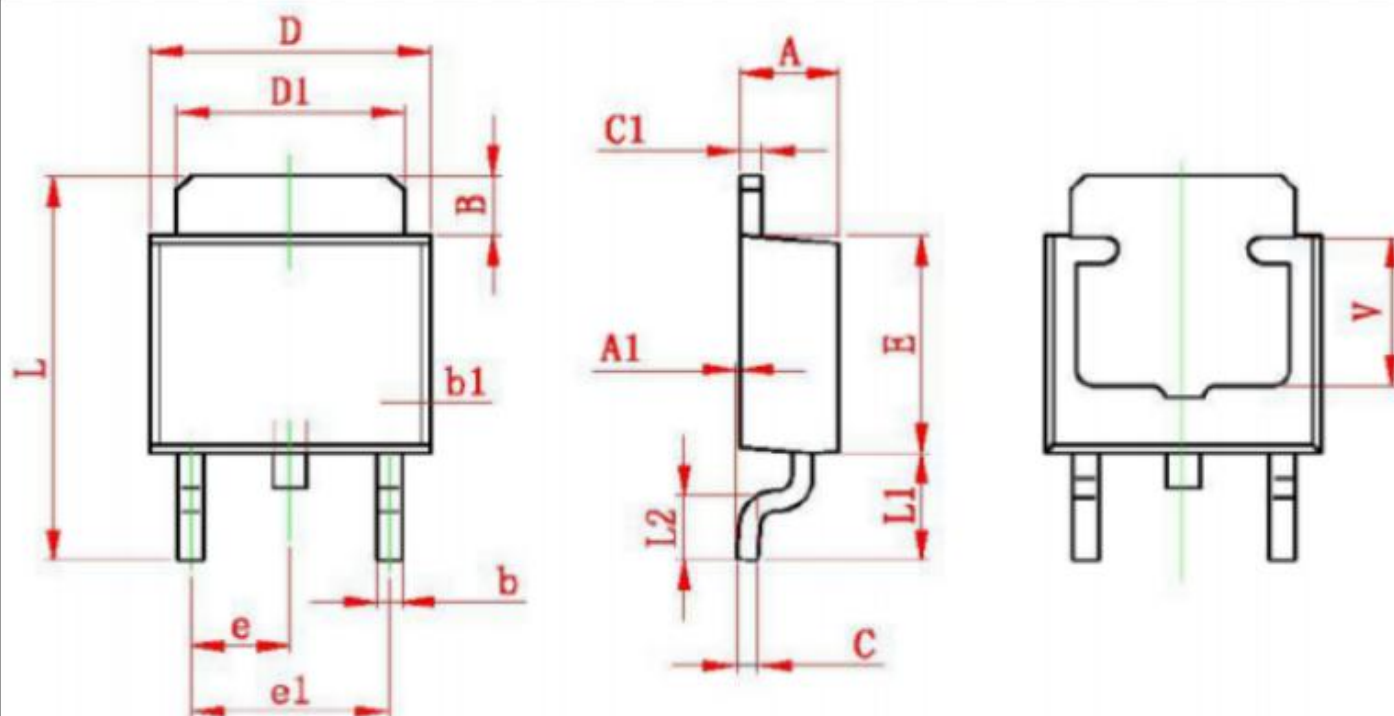


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP		0.091 TYP	
e1	4.500	4.700	0.177	0.185
L	9.500	9.900	0.374	0.390
L1	2.550	2.900	0.100	0.114
L2	1.400	1.780	0.055	0.070
V	3.80 REF		0.150 REF	



2SB772

SHENZHEN MENGKE ELECTRONICS TECHNOLOGY CO.,LTD

TO-251 PACKAGA OUTLINE DIMENSIONS

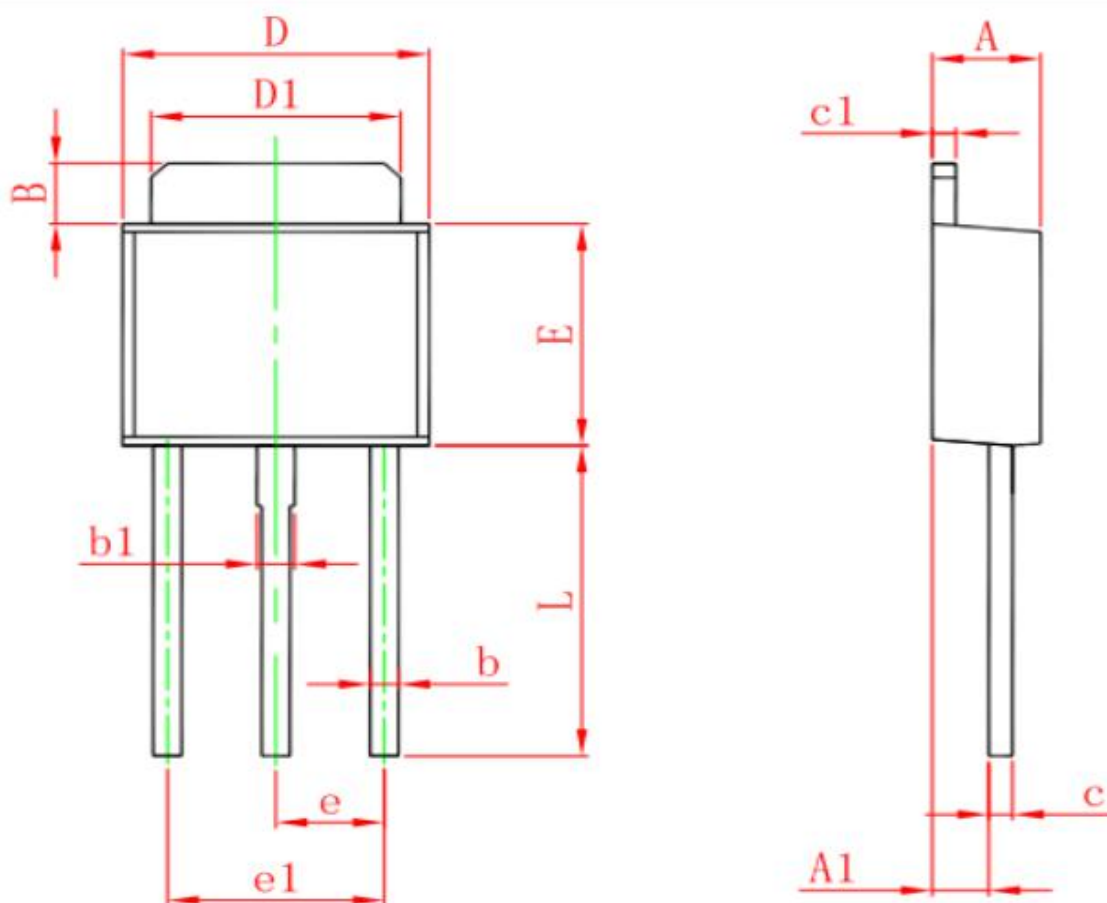

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	1.050	1.350	0.042	0.054
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP.		0.091 TYP.	
e1	4.500	4.700	0.177	0.185
L	7.500	7.900	0.295	0.311