

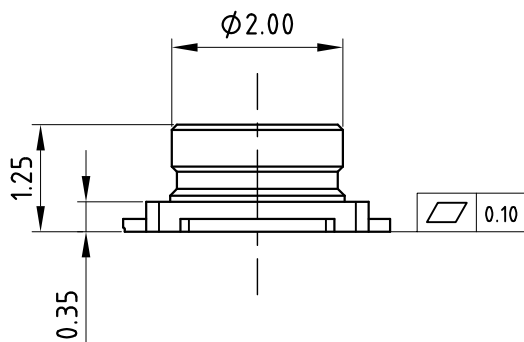
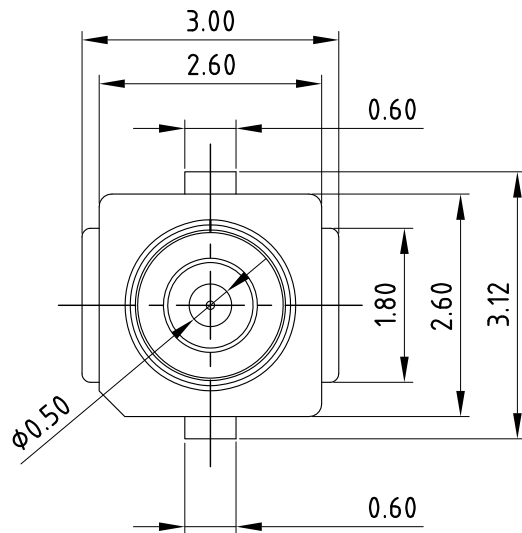


Kinghelm®


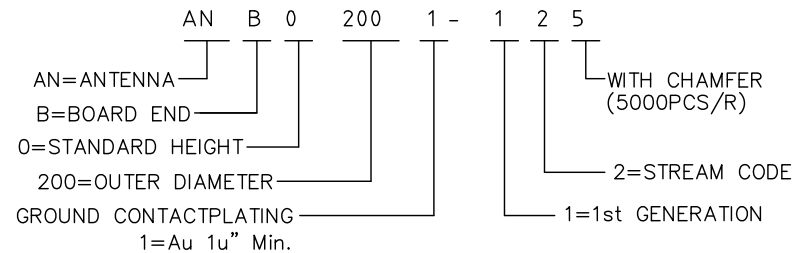


SCHEMATIC

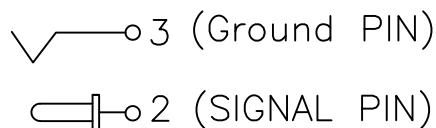

NOTES:

1. FREQUENCY RANGE:
DC TO 6GHZ (VSWR: 1.3MAX AT 0.1~3GHZ, 1.4MAX AT 3~6GHZ)
2. CHARACTERISTIC IMPEDANCE: 50Ω(NOMINAL);
3. TEMPERATURE: -40°C TO +90°C;
4. RATED VOLTAGE : 60VAC;
5. CONTACT RESISTANCE :
20mΩ MAX.(SIGNAL CONTACT)
20mΩ MAX.(GROUND CONTACT)
6. WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE MIN;
7. INSULATION RESISTANCE : 500MΩ MIN. AT 100VDC;
8. THIS COMPONENT IS HALOGEN FREE.

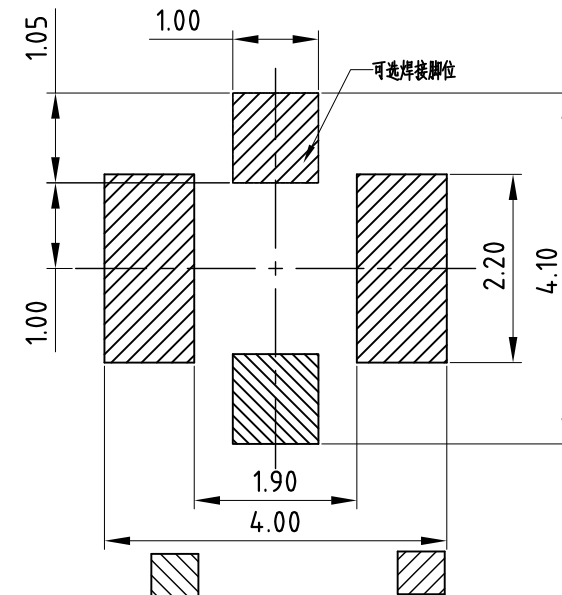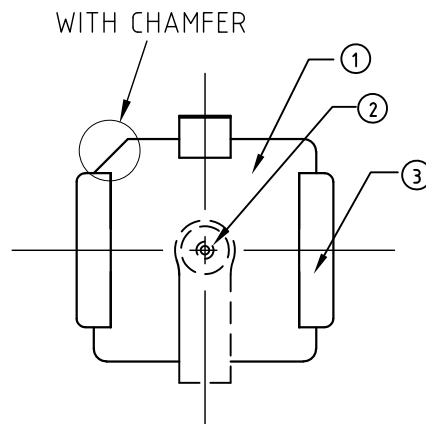

SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)
(TOLERANCE ±0.05)

3	GROUND CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.					
2	CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.					
1	HOUSING	1	THERMOPLASTIC	UL94V-0					
ITEM	NAME	Q'TY	MATERIAL	FINISH					
TOLERANCES UNLESS OTHERWISE SPECIFIED			深圳市金航标电子有限公司		WWW.BDS666.COM				
			KH-IPEX-K501-29		0755-83044319				
			SERIES:			TITLE:			
			RF 1G BOARD END			RF 1G H TYPE BOARD END			
			APPD: 王宁 2018/07/09			PART No.:			
			CKD: 段国强 2018/07/09			ANB02001-125			
			DR: 段国强 2018/07/09			DWG No.:			
			307-0000-0193						
技术详询				UNITS	MAT'L	FINISH	SCALE	SHEET	REV.
			MM	N/A	N/A	1:1	1/1	A	