

SCHOTTKY BARRIER RECTIFIER

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data


Case : JEDEC DO-201AD Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.04 ounce, 1.10 grams

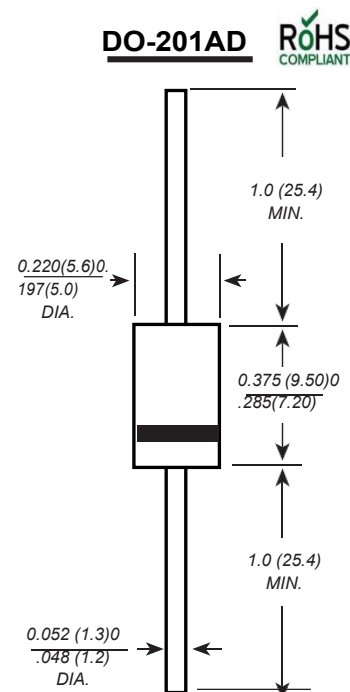

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SR 520	SR 530	SR 540	SR 550	SR 560	SR 570	SR 580	SR 590	SR 5100	SR 5150	SR 5200	UNITS	
Marking Code		RCD SR 520	RCD SR 530	RCD SR 540	RCD SR 550	RCD SR 560	RCD SR 570	RCD SR 580	RCD SR 590	RCD SR 5100	RCD SR 5150	RCD SR 5200		
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	70	80	90	100	150	200	V	
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	49	56	63	70	105	140	V	
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	70	80	90	100	150	200	V	
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I _(AV)	5.0											A	
Peak forward surge current 8.3ms single half sine-wave superimposed onrated load (JEDEC Method)	I _{FSM}	150											A	
Maximum instantaneous forward voltage at 5.0A	V _F	0.55			0.70		0.85				0.95		V	
Maximum DC reverse current T _A =25℃ T _A at rated DC blocking voltage =100℃	I _R	0.5									0.2		mA	
		20.0				10.0			2.0					
Typical junction capacitance (NOTE 1)	C _J	500			400									pF
Typical thermal resistance (NOTE 2)	R _{θJA}	25.0											℃/W	
Operating junction and storage	T _J	-50 to +125					-50 to +150						℃	
Storage temperature range	T _{STG}	-50 to +150											℃	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

FIG. 1- FORWARD CURRENT DERATING CURVE

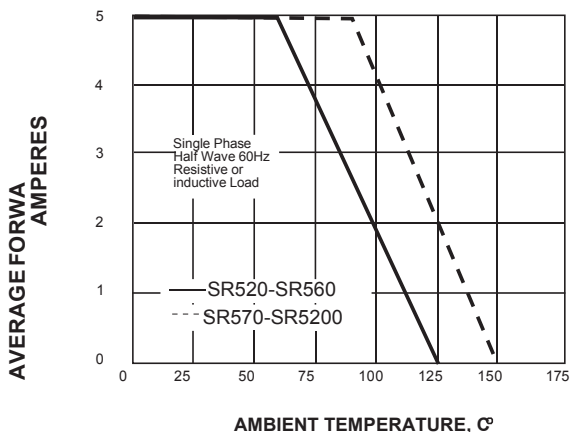


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

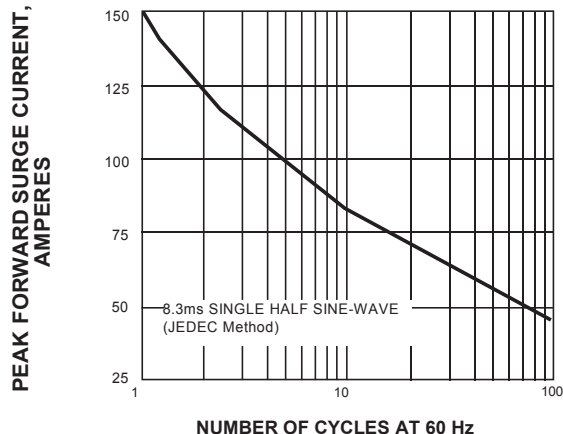


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

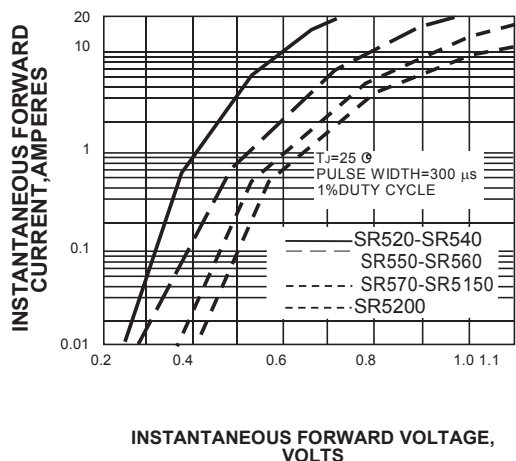


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

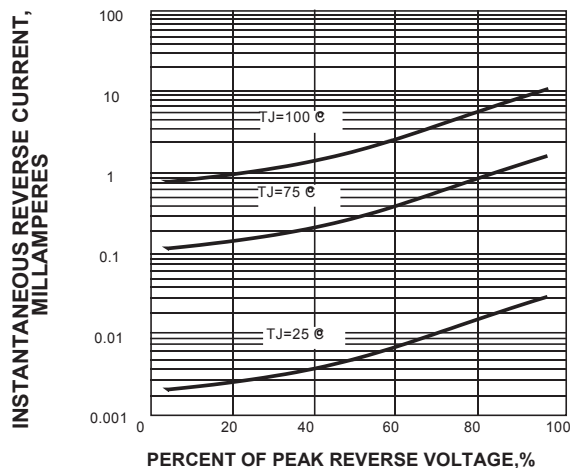


FIG. 5-TYPICAL JUNCTION CAPACITANCE


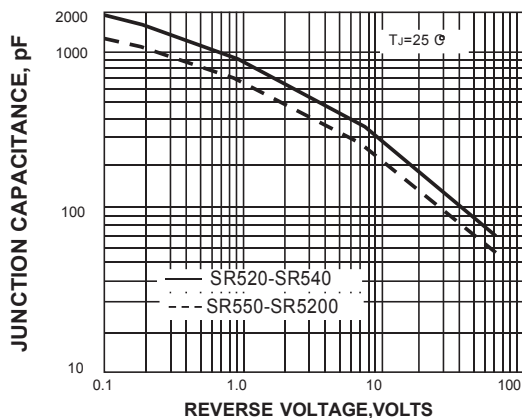



FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

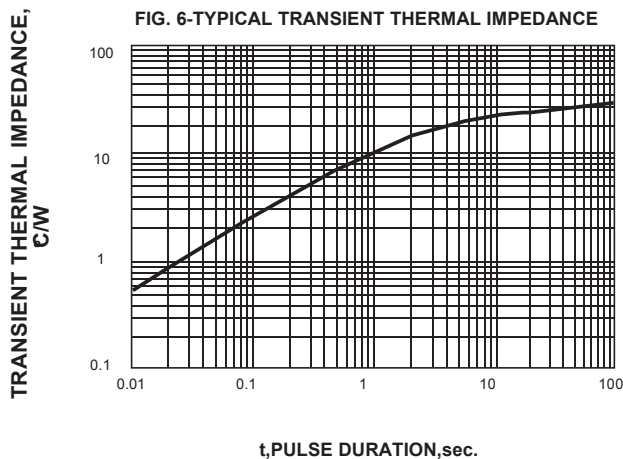

The curve above is for reference only.

Packing information

Taping Specifications

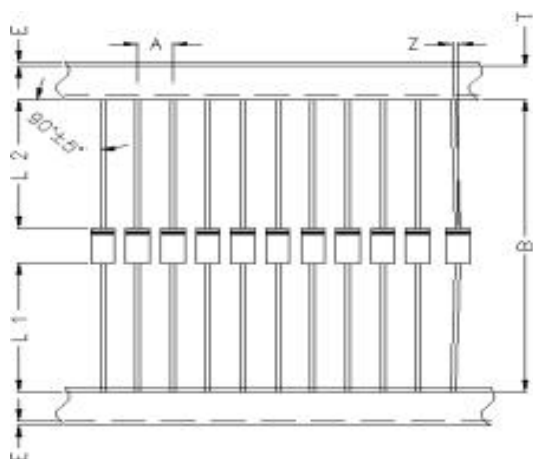

Item	Symbol	Specifications(mm)
Component Pitch	A	10.0±0.5
Inner Tape Pitch	B	52.4±1.5
Component alignment	Z	1.2 Max
Tape width	T	6.0±0.5
Exposed adhesive	E	0.8 Max
Body eccentricity	L1-L2	1.0 Max

Ammunition Package Specifications

Package	Inner Box Size (mm)	QTY/Box (pcs)	Carton Size (mm)	Q'TY/Carton (pcs)
DO - 201AD	255*74*145	1000	410*275*340	10000

Bulk Package Specifications

Package	Inner Box Size (mm)	QTY/Box (pcs)	Carton Size (mm)	Q'TY/Carton (pcs)
DO - 201AD	198*86*21	200	460*220*250	10000