


DATA SHEET

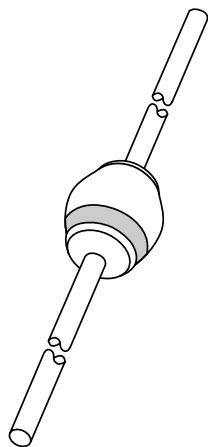

BY328 Damper diode

Product specification
Supersedes data of May 1996

1996 Sep 30

Damper diode

BY328


FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Available in ammo-pack
- Also available with preformed leads for easy insertion.

DESCRIPTION

Rugged glass package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

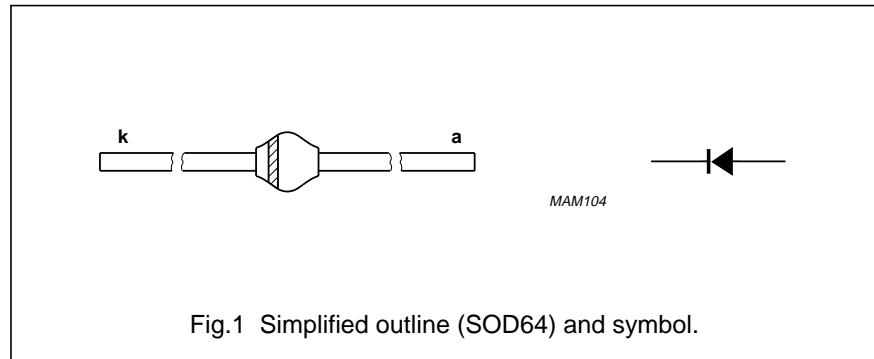

APPLICATIONS

- Damper diode in high frequency horizontal deflection circuits up to 38 kHz.

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RSM}	non-repetitive peak reverse voltage		–	1500	V
V_{RRM}	repetitive peak reverse voltage		–	1500	V
V_R	continuous reverse voltage		–	1400	V
I_{FWM}	working peak forward current	$T_{tp} = 55^\circ\text{C}$; lead length = 10 mm see Fig.2	–	6.0	A
		$T_{amb} = 55^\circ\text{C}$; PCB mounting (see Fig.5); see Fig.2	–	4.7	A
		$T_{amb} = 55^\circ\text{C}$; PCB mounting (see Fig.4); see Fig 2	–	3.0	A
I_{FRM}	repetitive peak forward current		–	10	A
I_{FSM}	non-repetitive peak forward current	$t = 10\text{ ms}$ half sinewave; $T_j = T_{j\max}$ prior to surge; $V_R = V_{RRM\max}$	–	60	A
T_{stg}	storage temperature		–65	+175	°C
T_j	junction temperature		–65	+150	°C

Damper diode

BY328

ELECTRICAL CHARACTERISTICS $T_j = 25^\circ\text{C}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
V_F	forward voltage	$I_F = 5 \text{ A}; T_j = T_{j \text{ max}}; \text{ see Fig.3}$	1.35	V
		$I_F = 5 \text{ A}; \text{ see Fig.3}$	1.45	V
I_R	reverse current	$V_R = V_{R\text{max}}; T_j = 150^\circ\text{C}$	150	μA
t_{rr}	reverse recovery time	when switched from $I_F = 0.5 \text{ A}$ to $I_R = 1 \text{ A}$; measured at $I_R = 0.25 \text{ A}$; see Fig.6	500	ns
t_{fr}	forward recovery time	when switched to $I_F = 5 \text{ A}$ in 50 ns; $T_j = T_{j \text{ max}}$; see Fig.7	500	ns

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th \text{ j-tp}}$	thermal resistance from junction to tie-point	lead length = 10 mm	25	K/W
$R_{th \text{ j-a}}$	thermal resistance from junction to ambient	note 1	75	K/W
		mounted as shown in Fig.5	40	K/W


Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer $\geq 40 \mu\text{m}$, see Fig.4. For more information please refer to the "General Part of associated Handbook".

Damper diode


BY328

GRAPHICAL DATA

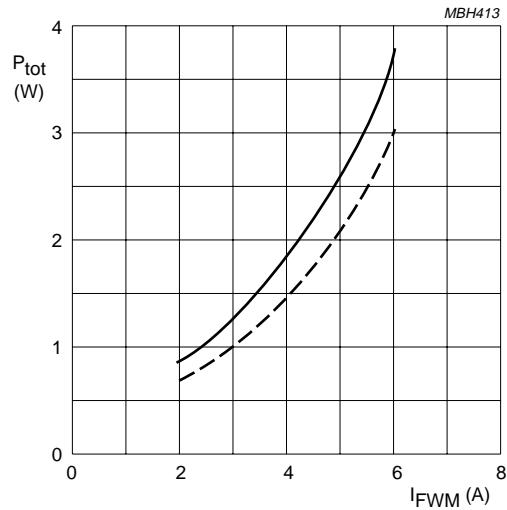


Solid line: basic high-voltage E/W modulator circuit; see Fig.8.
 Dotted line: basic conventional horizontal deflection circuit; see Fig.9.
 Curves include power dissipation due to switching losses.

Fig.2 Maximum total power dissipation as a function of working peak forward current.

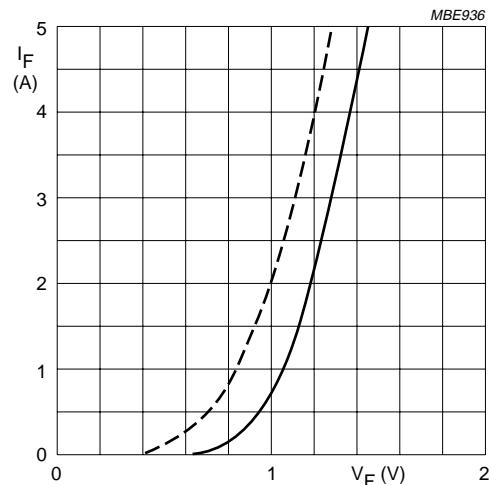


Dotted line: $T_j = 150$ °C; solid line: $T_j = 25$ °C.

Fig.3 Forward current as a function of forward voltage; maximum values.

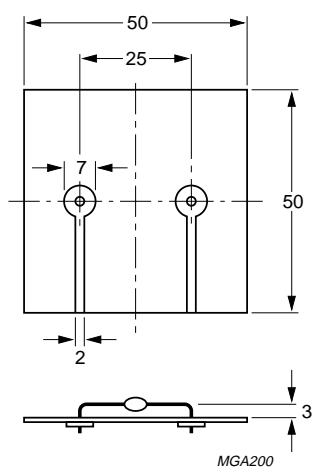

Dimensions in mm.

Fig.4 Device mounted on a printed-circuit board.


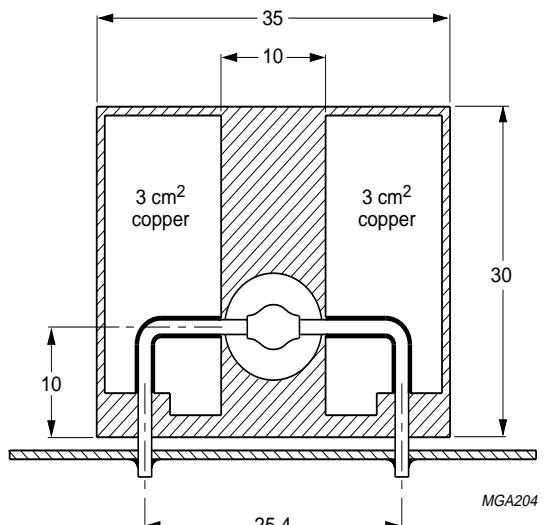


Dimensions in mm.

Fig.5 Mounting with additional printed circuit board for heat sink purposes.

Damper diode

BY328

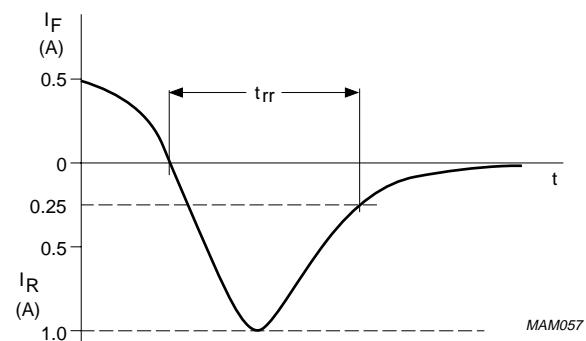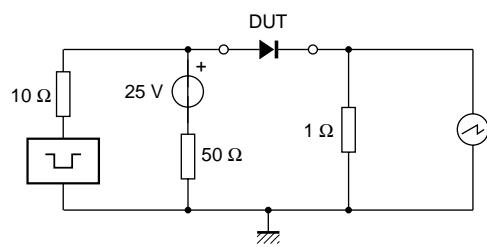

Input impedance oscilloscope: $1 \text{ M}\Omega$, 22 pF ; $t_r \leq 7 \text{ ns}$.

Source impedance: 50Ω ; $t_r \leq 15 \text{ ns}$.

Fig.6 Test circuit and reverse recovery time waveform and definition.

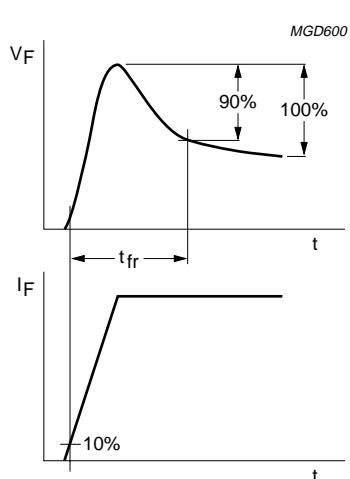


Fig.7 Forward recovery time definition.

Damper diode




BY328

APPLICATION INFORMATION

For horizontal deflection circuits, two basic applications are shown in Figs 8 and 9.

The maximum allowable total power dissipation for the diode can be calculated from the thermal resistance $R_{th\ j-a}$ and the difference between $T_{j\ max}$ and $T_{amb\ max}$ in the application. The maximum I_{FWM} can then be taken from Fig.2.


The basic application waveforms in Fig.10 relate to the circuit in Fig.8. In the circuit in Fig.9 the forward conduction time of the diode is shorter, allowing a higher I_{FWM} (see Fig.2).

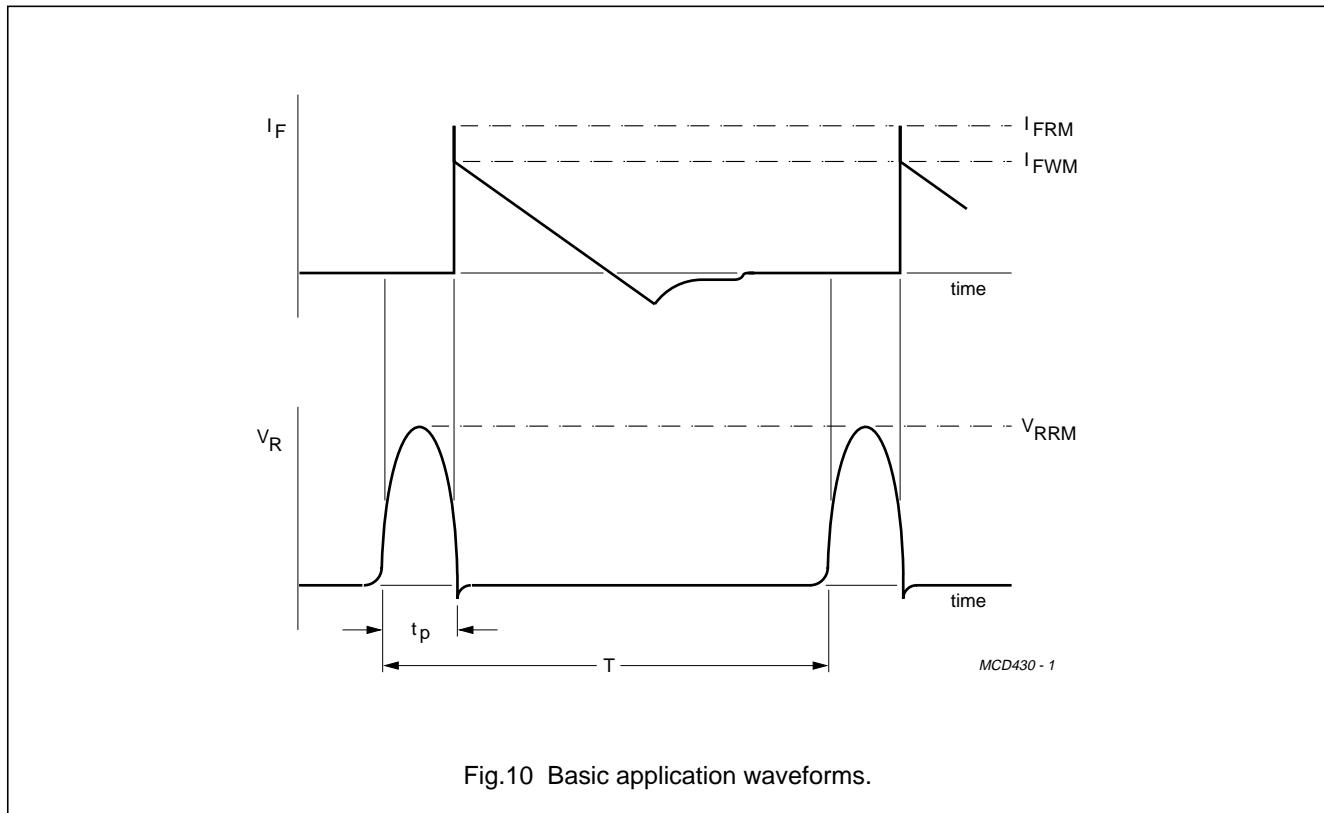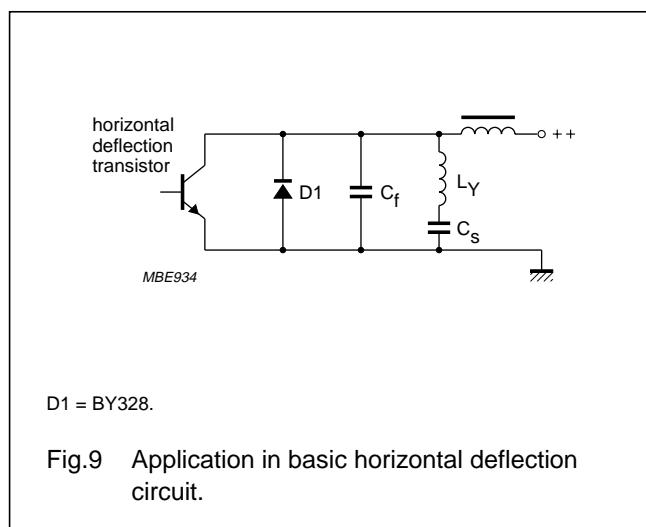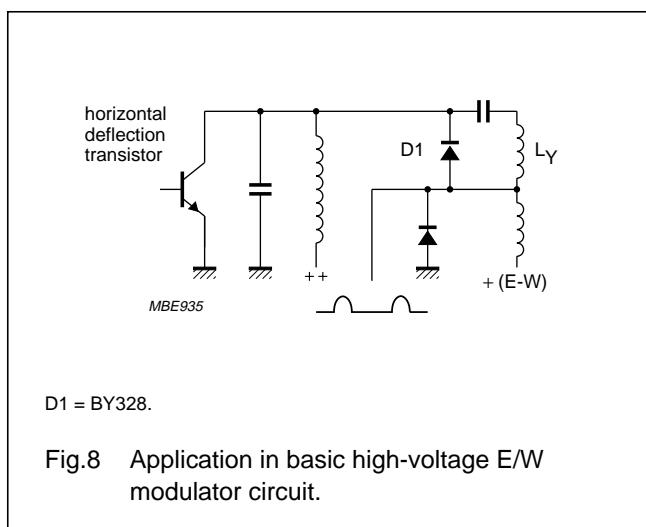

Damper diode

BY328

PACKAGE OUTLINE

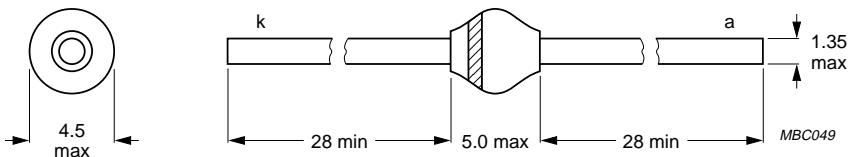

Dimensions in mm.

The marking band indicates the cathode.

Fig.11 SOD64.

DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

Catalog by Function

Discrete semiconductors
 Audio
 Clocks and Watches
 Data communications
 Microcontrollers
 Peripherals
 Standard analog
 Video
 Wired communications
 Wireless communications

Catalog by System

Automotive
 Consumer Multimedia Systems
 Communications
 PC/PC-peripherals

Cross reference

Models

Packages

Application notes

Selection guides

Other technical documentation

End of Life information

Datahandbook system

Relevant Links

About catalog tree
 About search
 About this site
 Subscribe to eNews
 Catalog & Datasheets
 Search
 [BY328](#)
 [BY328](#)

BY328; Damper diode

- [Description](#)
- [Features](#)
- [Applications](#)
- [Datasheet](#)
- [Products, packages, availability and ordering](#)
- [Find similar products](#)
-

Description

Rugged glass package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of matched.

Features

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Available in ammo-pack
- Also available with preformed leads for easy insertion.

Applications

- Damper diode in high frequency horizontal deflection circuits up to 38 kHz.

Datasheet

Type	nr.	Title	Publication release date	Datasheet status	Page count	File size (kB)
BY328		Damper diode	30-Sep-96	Product Specification	7	52

Products, packages, availability and ordering

<u>Partnumber</u>	<u>North American Partnumber</u>	<u>Order code (12nc)</u>	<u>marking/packing</u>	<u>package</u>	<u>device status</u>
BY328	BY328 T/R	9339 524 00113	Standard Marking * Reel Pack, Axial, Standard	SOD64	Full productic
	BY328 AMO	9339 524 00133	Standard Marking * Ammopack, Axial, 52mm	SOD64	Full productic
BY328/20	BY328/20	9340 347 60112	Standard Marking * Bulk Pack	SOD64	Full productic

Please read [information about some discontinued variants of this product.](#)

Find similar products:

[BY328](#) links to the similar products page containing an overview of products that function or related to the part number(s) as listed on this page. The similar products products from the same catalog tree(s) , relevant selection guides and products from functional category.

Copyright © 2000
Royal Philips Electronics
All rights reserved.
[Terms and conditions.](#)