


Features

- Glass Passivated Die Construction
- Low Forward Voltage Drop
- Low Leakage Current
- High Forward Surge Capability
- Designed for Surface Mount Application
- Plastic Material - UL Flammability 94V -O

NEW PRODUCT RELEASE

PATENT PENDING



Mechanical Data

- **Case:** TLM-J Molded Plastic
- **Terminals:** Solder plated, Solderable per J-STD-002B and JESD22-B102D
- **Polarity:** As Marked on body
- **Marking:** Type Number
- **Lead Free:** For ROHS/Leadfree Version

Major Ratings and Characteristics

$I_{F(AV)}$	0.5A, 0.8 A
V_{RRM}	50 V to 1000 V
I_{FSM}	20 A
I_R	5 μ A
V_F	1.1 V
$T_J \text{ max.}$	150 °C

Maximum Ratings & Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Items	Symbol	LX005M	LX01M	LX02M	LX04M	LX06M	LX08M	LX10M	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current	I _{F(AV)}	0.5 ¹⁾							A
		0.8 ²⁾							
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	20							A
Operating junction and storage temperature range	T _J , T _{STG}	−55 to +150							°C

1): Mounted on glass epoxy P.C.B with 1.2×1.5mm² pads.

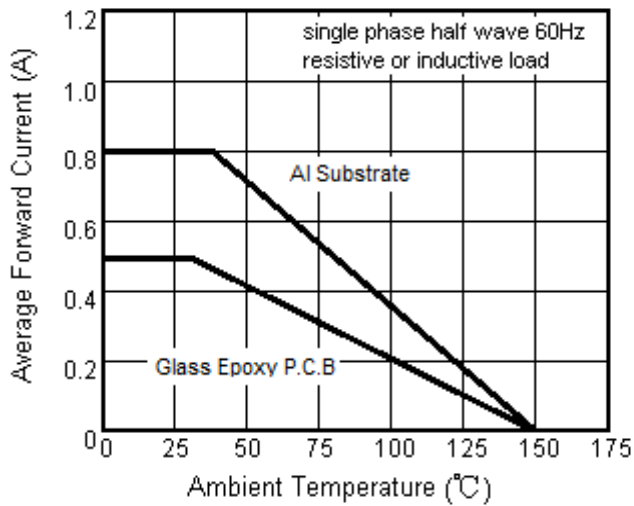
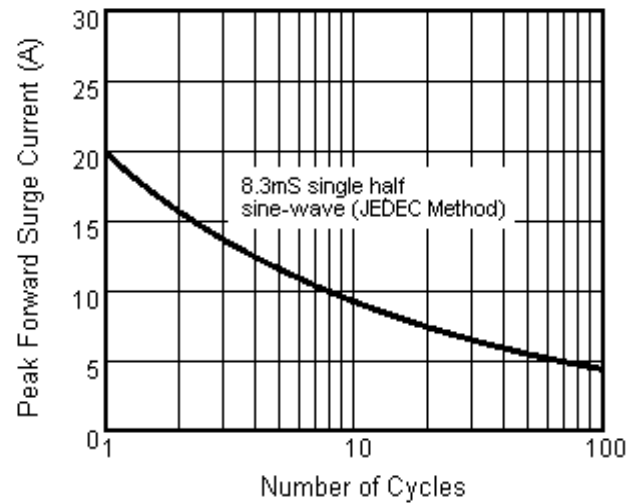
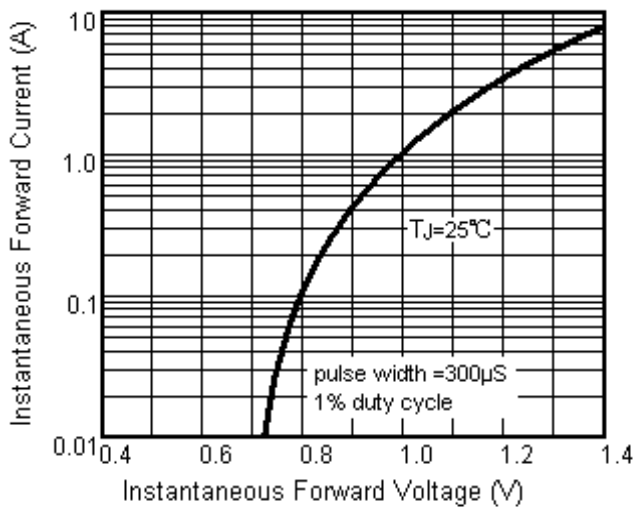
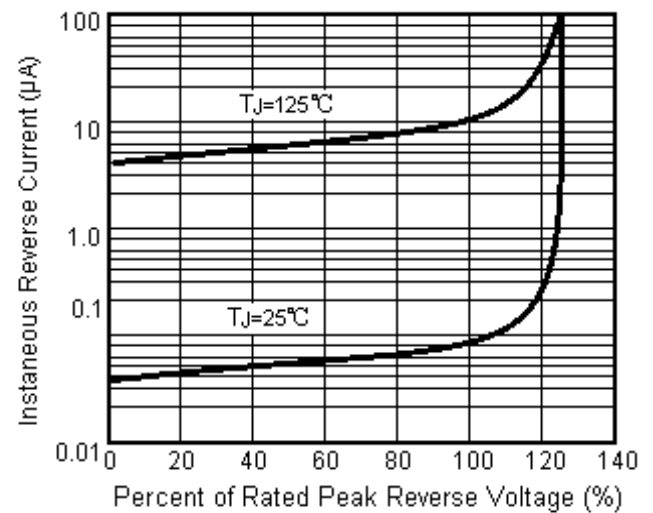
2): Mounted on aluminum substrate P.C.B with 1.2×1.5mm² pads.

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

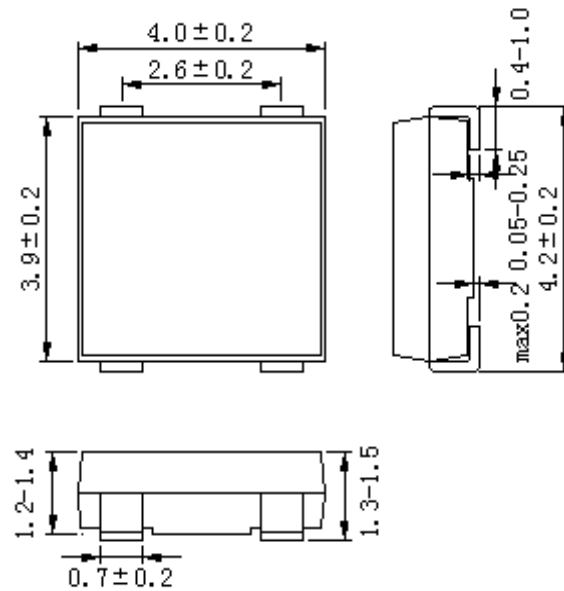
Items	Test conditions	Symbol	Min	Type	Max	
Instantaneous forward voltage	$I_F = 0.5A^{3)}$	V_F	-	0.95	1.1	V
Reverse current	$T_A = 25^\circ\text{C}$	I_R	-	-	5	μ A
	$T_A = 125^\circ\text{C}$		-	-	100	

3): Pulse test: 300 μ S pulse width, 1% duty cycle.

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

Fig.3 Typical Instantaneous Forward Characteristics

Fig.4 Typical Reverse Characteristics


Package Outline



Soldering Pad

