



FEATURES

- * Low forward voltage drop
- * Low leakage current
- * High reliability
- * High current capability

MECHANICAL DATA


- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.34 grams

VOLTAGE RANGE

50 to 600 Volts

CURRENT

1.0 Ampere

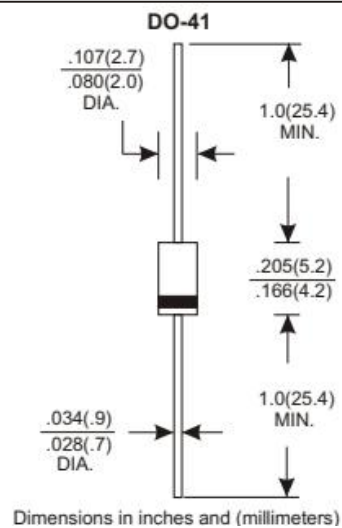

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25 C ambient temperature unies otherwies specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	1N4933	1N4934	1N4935	1N4936	1N4937	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	V	
Maximum RMS Voltage	35	70	140	280	420	V	
Maximum DC Blocking Voltage	50	100	200	400	600	V	
Maximum Average Forward Rectified Current . 375"(9.5mm) Lead Length at Ta=75 C						1.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)						30	A
Maximum Instantaneous Forward Voltage at 1.0A						1.2	V A
Maximum DC Reverse Current Ta=25 C						5.0	μA
at Rated DC Blocking Voltage Ta=100 C						100	μS
Maximum Reverse Recovery Time (Note 1)						200	pF
Typical Junction Capacitance (Note 2)						15	
Operating and Storage Temperature Range Tj, Tstg						-65 —+150	C

NOTES:

1. Reverse Recovery Time test condition:IF=1.0A, VR=30V.
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

RATING AND CHARACTERISTIC CURVES (1N4933 THRU 1N4937)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

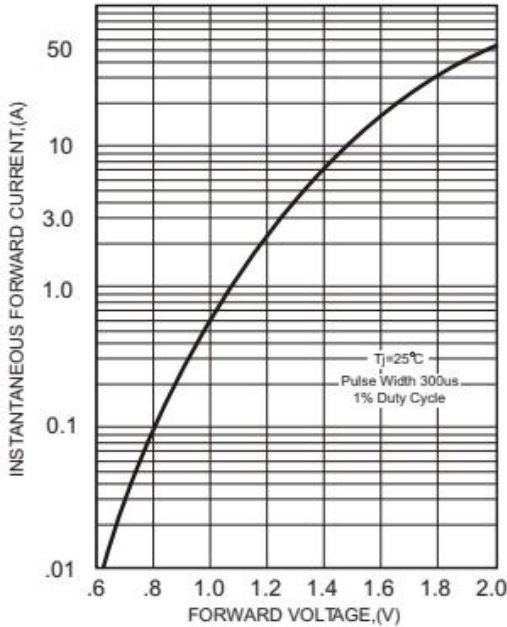


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

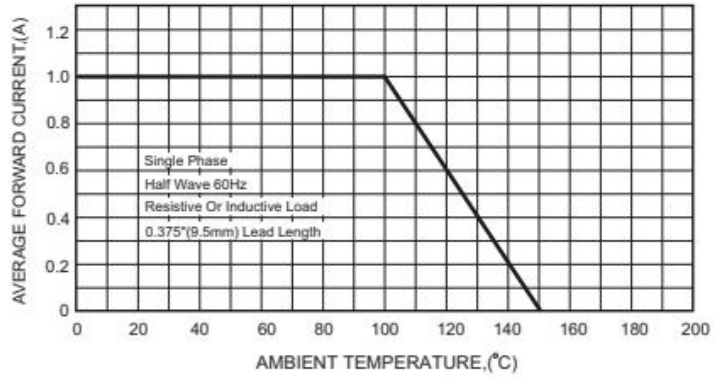


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


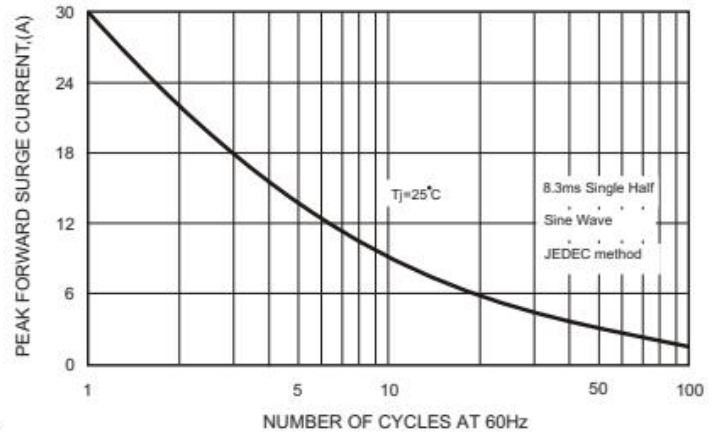


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS



A- TEKTRONIX 545A. K PLUG IN PRE AMP P6000 PROBE OR EQUIVALENT
R1- ADJUSTED FOR 14 BETWEEN POINT 2 OF RELAY AND RECTIFIER INDUCTIVE \approx 3.8 H
R2- TEN 1W 10 1% CARBON CORE IN PARALLEL
 $T_A = 25 \pm 10^\circ\text{C}$ FOR RECTIFIER

FIG.5-TYPICAL JUNCTION CAPACITANCE

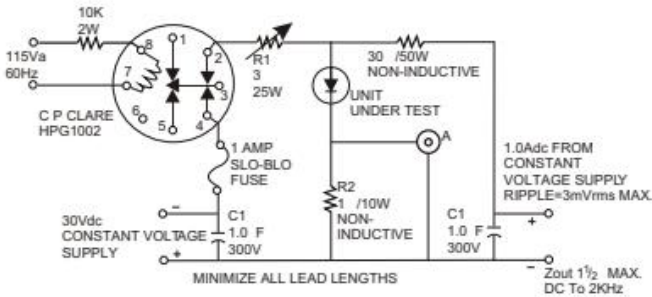