

GLASS PASSIVATED RECTIFIERS

FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- The plastic material has UL flammability classification 94V-0

MECHANICAL DATA

Case: KBP molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-202, Method 208


Polarity: As marked on body

Mounting Position: Any

Weight: 0.005 ounce (approx), 1.52 grams (approx)

KBP

ROHS
COMPLIANT



PACKAGE SPECIFICATIONS

Package	Tube Size	Q'TY/Tube (pcs)	Box Size (mm)	QTY/Box (cs)	Carton Size (mm)	Q'TY/Carton (pcs)
KBP	-	-	203×203×35	500	435×215×210	5000

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

CHARACTERISTICS	SYMBOL	RCD KBP4005G	RCD KBP401G	RCD KBP402G	RCD KBP404G	RCD KBP406G	RCD KBP408G	RCD KBP410G	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C=105^{\circ}C$ (With heatsink) (Without heatsink)	$I_{(AV)}$	4.0 2.0							A
Peak Forward Surge Current 8 .3ms single half sine-wave @ $T_J = 25^{\circ}C$	I_{FSM}	75							A
Peak Forward Surge Current 1 .0ms single half sine-wave @ $T_J = 25^{\circ}C$	I_{FSM}	150							A
Maximum Forward Voltage at 4.0A DC	V_F	1.1							V
Maximum DC Reverse Current at rated Blocking Voltage @ $T_J=25^{\circ}C$ @ $T_J=125^{\circ}C$	I_R	5.0 500							μA
I^2t Rating for fusing ($3ms \leq t \leq 8.3ms$)	I^2t	26.5							A^2S
Typical Junction Capacitance per element (Note 1)	C_J	50							pF
Typical thermal resistance (Unit mounted on 75mmx75mmx1.6mm Copper plate heatsink.)	$R_{\theta JC}$ $R_{\theta JL}$ $R_{\theta JA}$	10 12 30							$^{\circ}C/W$
Typical thermal resistance (without heatsink)	$R_{\theta JC}$ $R_{\theta JL}$ $R_{\theta JA}$	12 18 40							$^{\circ}C/W$
Operation and Storage Temperature Range	T_J, T_{STG}	-55 to 150							$^{\circ}C$

Note: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V D.C.

2. The typical data above is for reference only.

FIG.1- FORWARD CURRENT DERATING CURVE

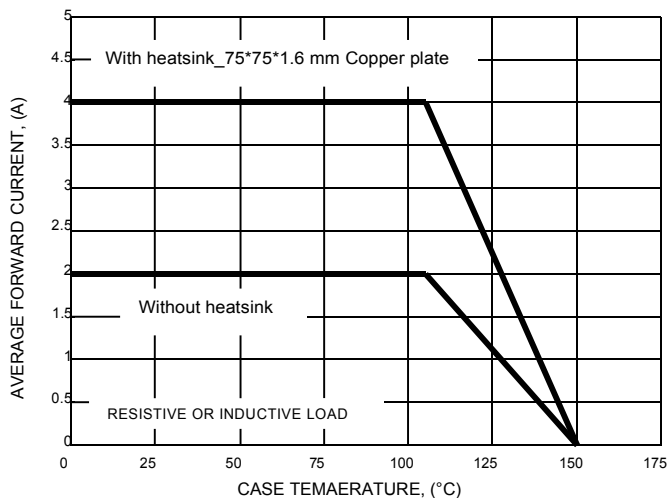


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

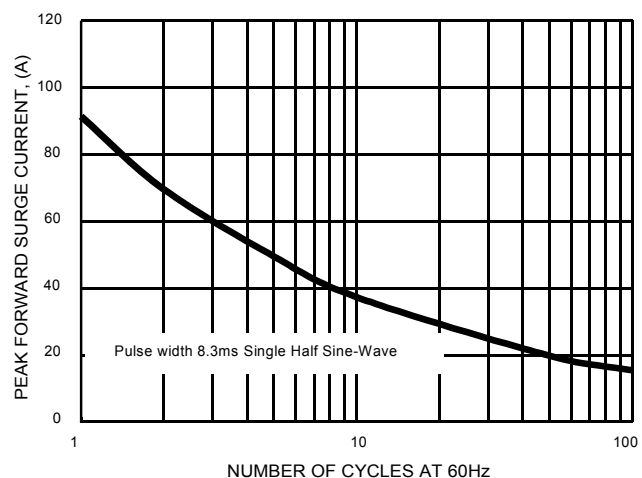


FIG.3- TYPICAL JUNCTION CAPACITANCE

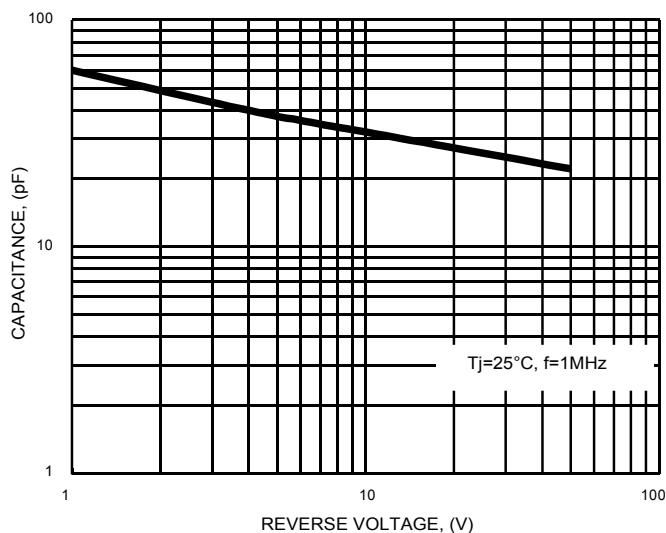


FIG.4- TYPICAL FORWARD CHARACTERISTICS



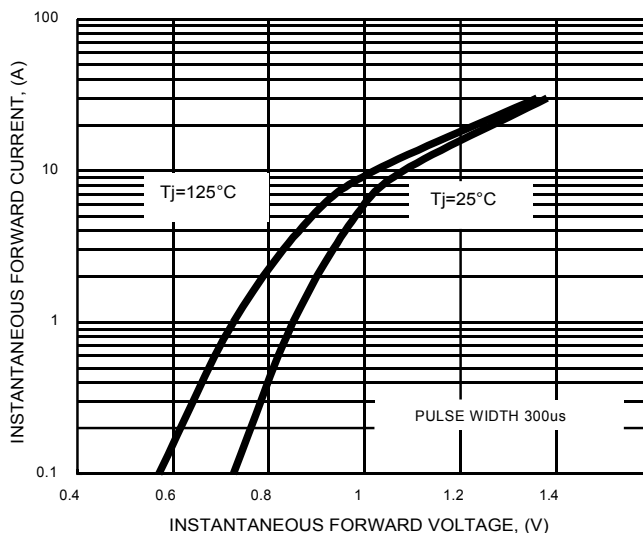


FIG.5- TYPICAL REVERSE CHARACTERISTICS

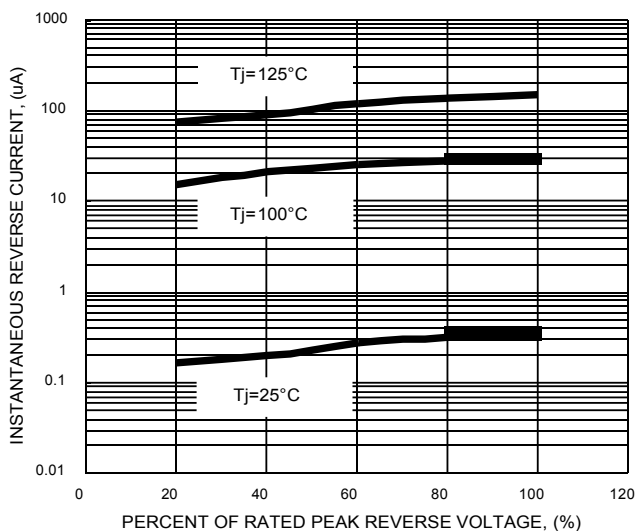

KBP Package Outline Dimensions

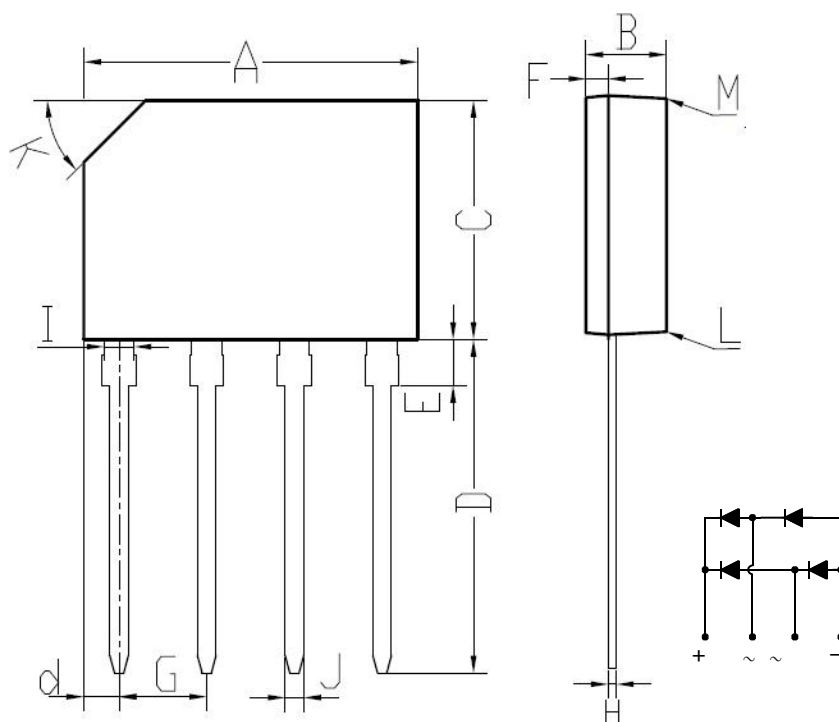

KBP		
DIM.	MIN.	MAX.
A	14.25	14.75
B	3.35	3.65
C	10.20	10.60
D	14.25	14.73
d	1.40	1.70
E	1.80	2.20
F	0.80	1.10
G	3.56	4.06
H	0.35	0.55
I	1.22	1.42
J	0.76	0.86
K	2.7 x 45° (Typ)	
L	#	3°
M	#	2°
All Dimensions in millimeter		